



ELECTRIFIED VEHICLE MOTOR SERIES

Permanent Magnet (PMAC) Motor for Mobile Systems



**WARNING - USER RESPONSIBILITY**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety, and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based on data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.
- The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

**WARNING**

This product can expose you to chemicals including nickel and nickel compounds, which are known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov

Table of Contents

| | |
|--|----|
| Introduction | 4 |
| Performance | 5 |
| Low Power Motor NX8M | 6 |
| Global Vehicle Motor GVM | 24 |
| Low Voltage Parker-Curtis Motor Controllers | 40 |
| High Voltage Parker-Curtis Motor Controllers | 41 |
| High Voltage Global Vehicle Inverter - GVI | 42 |
| Complementary Products | 43 |



Extra care is taken in the preparation of this literature, but Parker is not responsible for any inadvertent typographical errors or omissions. Information in this catalog is only accurate as of the date of publication. For a more current information base, please consult the web site at parker.com.

Permanent Magnet AC Motor Solutions for Mobile Systems

Parker's motor portfolio features two exceptional series of Permanent Magnet AC (PMAC) motors designed to meet the diverse needs of mobile applications, including electro-hydraulic pump systems and advanced vehicle performance.

NX8M Motor Series



The NX8M Motor Series is a low power motor specifically engineered for electro-hydraulic pump applications. Its easy implementation allows for direct pump assembly without any mounting interface, facilitating seamless integration. Capable of operating immersed in oil, the NX8M enhances pump performance while minimizing noise levels. This cost-effective solution is ideal for both on and off-road vehicles, providing high torque density and efficiency. When paired with a voltage-matched inverter, the NX8M serves as a reliable first step toward full vehicle electrification. Performance can be further optimized through optional water or oil cooling with cold plates as an option.

GVM Global Vehicle Motor Power Series



The GVM Power Series represents the pinnacle of high power PMAC motors, delivering outstanding performance tailored for vehicle duty applications. With a decade-long legacy and thousands of units sold, the GVM series excels in high power density and speed capabilities, making it suitable for traction and electro-hydraulic pumps (EHP) with peak power ratings of up to 850 kW. Notably, the GVM achieves efficiency levels up to 2% higher than comparable PMAC designs, resulting in energy savings of up to 30% compared to traditional induction technologies. Additionally, the GVM functions as a highly efficient generator, providing versatility across various vehicle platforms.

Both motor series feature advanced cooling systems that enhance performance and simplify design, positioning Parker as a leader in providing the building blocks for vehicle electrification. By developing turnkey technologies, Parker reduces time to market and supply chain complexity, ensuring that customers benefit from innovative solutions that drive efficiency and performance in mobile applications.

Applications:

- Electro-hydraulic pumps
- Traction
- Generators
- Auxiliaries
- Diesel Electric
- Hybrid and Full Electric

Markets:



- Construction
- Mining
- Material Handling
- Trucks
- Bus
- Agriculture
- Military

And other off-highway vehicle, autonomous vehicle, and E-Mobility markets

Performance

By selecting the appropriate voltage, rotor length and winding variation, the following parameters can be refined to match the vehicle's specific performance requirements:


- Peak torque
- Peak power
- Rated torque
- Rated speed
- Rated power
- Maximum speed

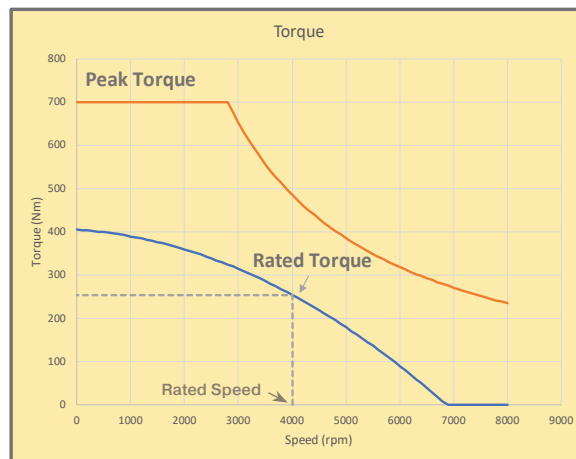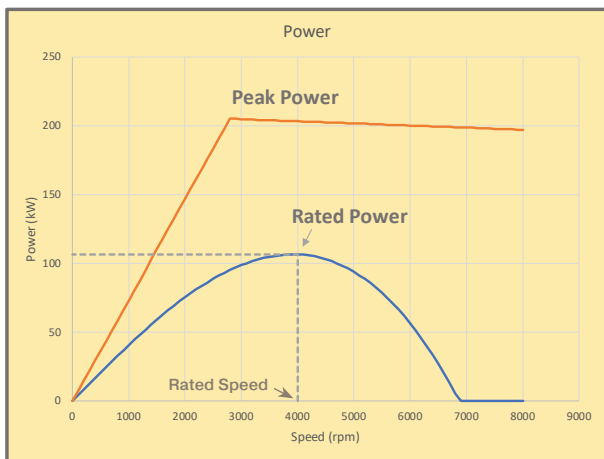


Efficiency

Only when using the best component technology and optimal design characteristics do traction motors/generators and controllers minimize losses both during motoring and power generation (four quadrant mode) increasing vehicle range. Variable speed system allows higher efficiency even at low speed.

Typical Efficiency Maps - Battery Voltage 650 VDC

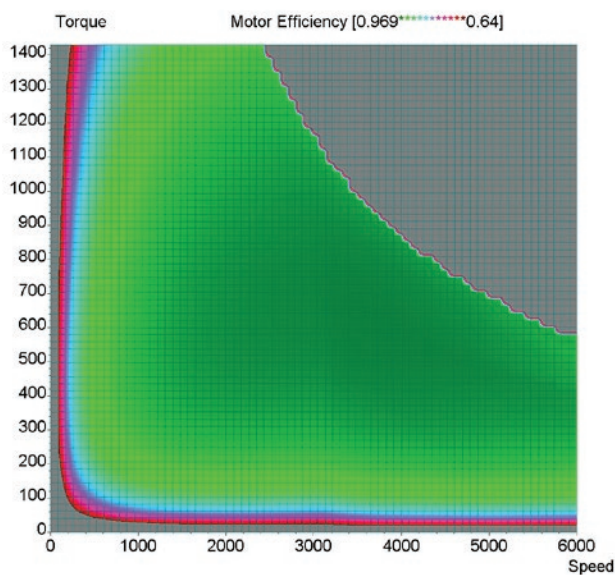

GVM310-250-BA-2 in motor operation mode

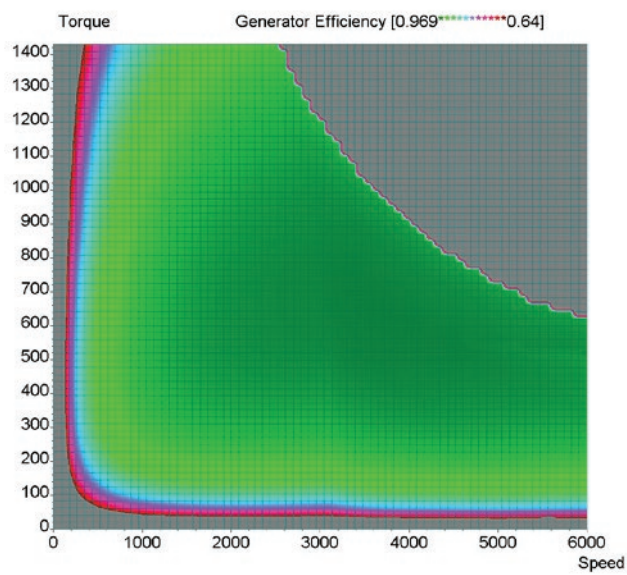

GVM310-250-BA-2 in generator operation mode

Low Power Motor - NX8M


Overview

Available in both low voltage and high voltage versions, the easy to implement NX8M permanent magnet AC motor is the ideal choice for your low power electro hydraulic pump applications, allowing a direct pump assembly without any mounting interface.

It is also capable of working immersed in oil, allowing improved pump performance and lower noise level. This cost effective solution has been engineered for both on and off-road vehicles.

The high torque density and high efficiency of Parker Permanent Magnet AC (PMAC) motors combined with a voltage matched inverter provide a solution to easily electrify hydraulic pumps, as a first step on the journey to full vehicle electrification.

Performances can be increased through water or oil cooling with optional cold plates.

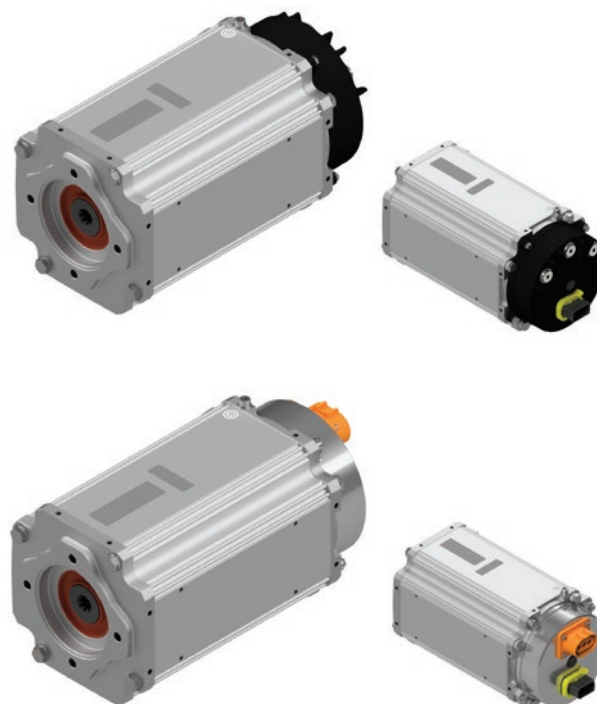

Product Features

- Easy mechanical mounting with fixing locations on all 4 sides
- For battery voltage up to 800 Vdc
- Membrane breather vent to minimise internal condensation
- Direct SAE A, SAE B, ISO 3019/2 pump mounting interface
- Natural convection cooling; cold plates in option
- Oil immersion capability
- Easy combination with Parker Global Vehicle Inverter (GVI)

Applications

- Electro-hydraulic pumps for construction vehicles
- Steering applications
- Hybrid power generation
- Mobile machinery
- Electric Actuators

Technical characteristics

| Model | NX8M |
|-----------------------------|------------------------------------|
| Motor type | Permanent magnet synchronous motor |
| Battery voltage | 24 - 800 Vdc |
| Max. speed | 8000 rpm |
| Peak power | 99 kW |
| Operating temperature range | -20°C to +60°C |
| Protection | IP67 |
| Feedback | Resolver, Sin/Cos encoder |
| Thermal protection | PT1000 |
| Cooling | Natural convection or cold plate |
| Marking | CE |



Technical Specifications - Low voltage Version

Front face cooled 60°C

| Inverter input voltage | Motor Type* | Max speed rpm | Rated torque N.m | Rated power kW | Peak Power kW |
|------------------------|-------------|---------------|------------------|----------------|---------------|
| 24Vdc | NX82HMSB | 6000 | 17 | 7.5 | 22.3 |
| | NX84HMSB | 2700 | 35.4 | 7.8 | 21.4 |
| | NX86HMSB | 1750 | 49.3 | 7.0 | 20.4 |
| 48Vdc | NX82HMSD | 6000 | 16.7 | 7.6 | 23.4 |
| | NX84HMSC | 4000 | 32 | 9.7 | 31.1 |
| | NX84HMSB | 5000 | 24.9 | 10.4 | 48.1 |
| | NX86HMSB | 3500 | 37 | 11.2 | 47.1 |
| 96Vdc | NX82HMSG | 7000 | 15.5 | 8.3 | 27.6 |
| | NX82HMSE | 7500 | 13 | 7,6 | 39 |
| | NX84HMSF | 4000 | 32 | 9.7 | 31.7 |
| | NX84HMSC | 5000 | 24.1 | 9.1 | 56.5 |
| | NX86HMSD | 3700 | 36.3 | 11.2 | 48.1 |
| | NX86HMSC | 4000 | 33.4 | 10.5 | 64.5 |

Motor data for standard air cooled with front flange surface exchange of 60°C

* Other motor performances and oil immersion capability are available on request. Please contact Parker.

Cold plate water cooled 65°C

| Inverter input voltage | Motor Type | Max speed rpm | Rated torque N.m | Rated power kW | Peak Power kW |
|------------------------|------------|---------------|------------------|----------------|---------------|
| 24Vdc | NX82WMSB | 6000 | 22 | 9.7 | 22.3 |
| | NX84WMSB | 3000 | 46.1 | 9.8 | 21.4 |
| | NX86WMSB | 2000 | 69.2 | 9.8 | 20.4 |
| 48Vdc | NX82WMSD | 6000 | 21.4 | 10.7 | 23.4 |
| | NX84WMSC | 4000 | 43.4 | 14.1 | 31.1 |
| | NX84WMSB | 6000 | 38.7 | 17.6 | 48 |
| | NX86WMSB | 4000 | 62.6 | 19.0 | 47.1 |
| 96Vdc | NX82WMSG | 7000 | 20.8 | 12.0 | 27.6 |
| | NX82WMSE | 8000 | 17.7 | 13.3 | 39.1 |
| | NX84WMSF | 4000 | 43.1 | 14.0 | 31.7 |
| | NX84WMSC | 7000 | 30.1 | 18.7 | 65.9 |
| | NX86WMSD | 4000 | 60.8 | 20.1 | 48.1 |
| | NX86WMSB | 6500 | 44 | 23,2 | 99 |

Cold plate oil cooled 65°C

| Inverter input voltage | Motor Type | Max speed rpm | Rated torque N.m | Rated power kW | Peak Power kW |
|------------------------|------------|---------------|------------------|----------------|---------------|
| 24Vdc | NX82LMSB | 6000 | 17.9 | 7.9 | 22.3 |
| | NX84LMSB | 3000 | 36.8 | 7.8 | 21.4 |
| | NX86LMSB | 2000 | 54.3 | 7.7 | 20.4 |
| 48Vdc | NX82LMSD | 6000 | 17 | 8.5 | 23.4 |
| | NX84LMSC | 4000 | 32.6 | 10.6 | 31.1 |
| | NX84LMSB | 5000 | 25,5 | 11,3 | 48,1 |
| | NX86LMSB | 3500 | 43.9 | 13.3 | 47.1 |
| 96Vdc | NX82LMSG | 7000 | 15.9 | 9.1 | 27.6 |
| | NX82LMSE | 8000 | 13.7 | 8.6 | 39.1 |
| | NX84LMSF | 4000 | 33.4 | 10.1 | 31.7 |
| | NX84LMSC | 5000 | 24.9 | 10.1 | 56.5 |
| | NX86LMSD | 3700 | 43.3 | 13.4 | 48.1 |
| | NX86LMSC | 4500 | 36.7 | 13.4 | 65.6 |

Technical Specifications - High Voltage Version

NX80KMA Front Face cooled 60°C

| Inverter input voltage | Motor | Max speed rpm | Rated torque N.m | Rated power kW | Peak Power kW |
|------------------------|----------|---------------|------------------|----------------|---------------|
| 350 | NX82KMAL | 4500 | 18.8 | 6.42 | 17.2 |
| | NX82KMAG | 7000 | 14.5 | 8.24 | 29.6 |
| | NX84KMAL | 2200 | 37.6 | 6.28 | 16.2 |
| | NX84KMAC | 5000 | 25.8 | 10.8 | 44.8 |
| | NX86KMAF | 2500 | 46.3 | 9.39 | 31.0 |
| | NX86KMAD | 3100 | 43 | 10.8 | 38.8 |
| 650 | NX82KMAX | 2500 | 20 | 3.8 | 8.5 |
| | NX82KMAM | 7000 | 14.3 | 8.36 | 30.3 |
| | NX84KMAQ | 2600 | 35.7 | 7.53 | 20.8 |
| | NX84KMAJ | 4600 | 27.4 | 10.9 | 41.9 |
| | NX86KMAO | 2000 | 48.7 | 7.9 | 23.6 |
| | NX86KMAF | 4000 | 33.5 | 10.9 | 61.2 |

NX80GMA Water cooled 65°C

| Inverter input voltage | Motor | Max speed rpm | Rated torque N.m | Rated power kW | Peak Power kW |
|------------------------|----------|---------------|------------------|----------------|---------------|
| 350 | NX82GMAL | 4600 | 23,3 | 8,13 | 17,2 |
| | NX82GMAG | 7400 | 20,4 | 11,8 | 29,5 |
| | NX84GMAL | 2400 | 48 | 8,15 | 16,3 |
| | NX84GMAC | 5500 | 40,8 | 17 | 44,7 |
| | NX86GMAF | 2800 | 68 | 14 | 30,9 |
| | NX86GMAD | 3500 | 67,1 | 16,6 | 38,7 |
| 650 | NX82GMAX | 2600 | 23,9 | 4,56 | 8,5 |
| | NX82GMAL | 8000 | 19,8 | 12,9 | 33,4 |
| | NX84GMAQ | 3000 | 46,2 | 9,79 | 20,8 |
| | NX84GMAE | 7000 | 29,7 | 18,5 | 67,9 |
| | NX86GMAO | 2200 | 69,4 | 11,2 | 23,6 |
| | NX86GMAD | 6000 | 52,4 | 24,7 | 75,1 |

NX80FMA Oil cooled 65°C


| Inverter input voltage | Motor Type | Max speed rpm | Rated torque N.m | Rated power kW | Peak Power kW |
|------------------------|------------|---------------|------------------|----------------|---------------|
| 350 | NX82FMAL | 4500 | 19,6 | 6,7 | 17,2 |
| | NX82FMAG | 7100 | 15,5 | 8,94 | 29,6 |
| | NX84FMAL | 2200 | 38,9 | 6,49 | 16,2 |
| | NX84FMAC | 5000 | 27,9 | 11,7 | 44,8 |
| | NX86FMAF | 2600 | 51,6 | 10,5 | 30,9 |
| | NX86FMAD | 3100 | 49,2 | 12,4 | 38,8 |
| 650 | NX82FMAX | 2500 | 20,8 | 3,95 | 8,5 |
| | NX82FMAL | 7800 | 14 | 9,18 | 33,7 |
| | NX84FMAQ | 2700 | 36,8 | 7,81 | 20,8 |
| | NX84FMAH | 5200 | 26,5 | 11,6 | 48,2 |
| | NX86FMAO | 2000 | 53,6 | 8,7 | 23,6 |
| | NX86FMAD | 4500 | 37,1 | 13,1 | 73,8 |

Note: Other motor performances and oil immersion capability are available on request. Please contact Parker.

Dimensions - Low Voltage

Standard SAE A interface

Natural Convection

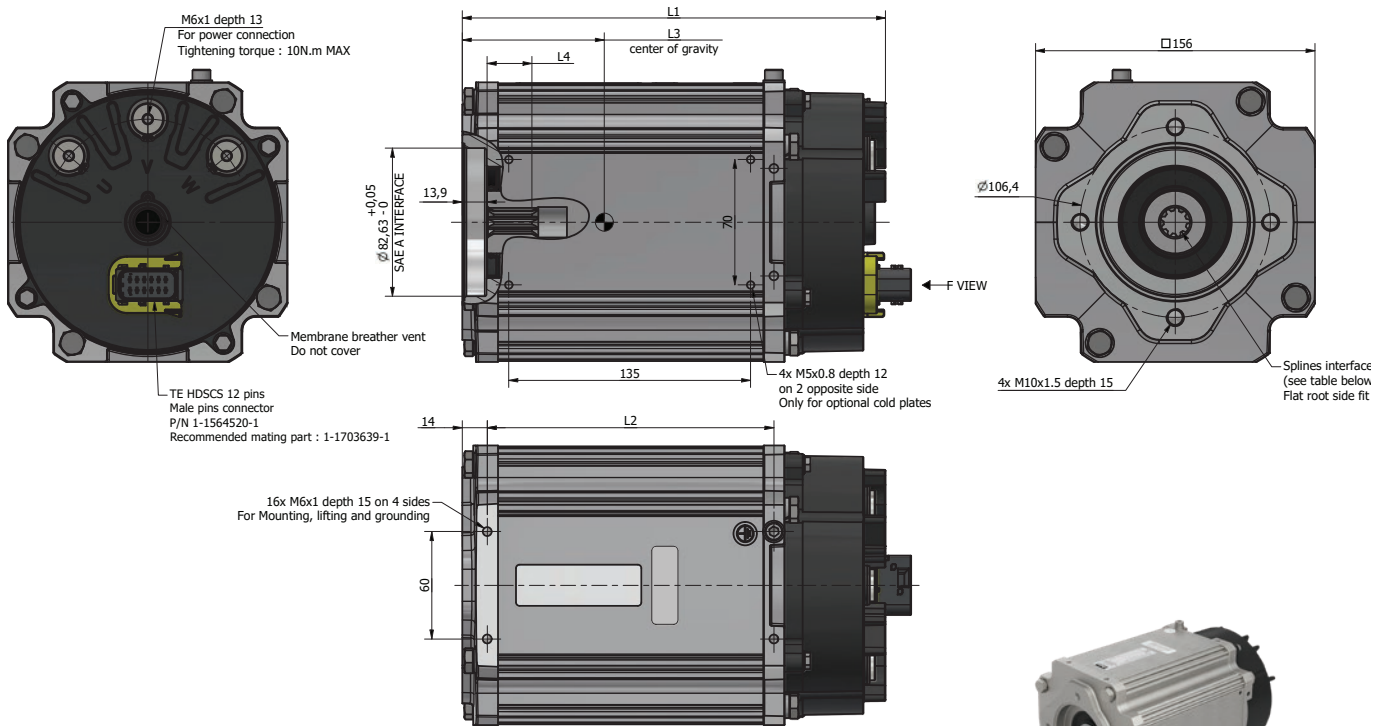


| ANSI B92.1 | SAE A |
|---|---------|
| Flat root side fit | Class 5 |
| Number of teeth | 9 |
| Spline Pitch | 16/32 |
| Pressure angle | 30° |
| Base diameter (Ref) | 12.373 |
| Pitch diameter (Ref) (Runout of 0.08mm at PCD) | 14.288 |
| Major diameter (Max) | 16.535 |
| Form diameter (Max) | 15.977 |
| Minor diameter (Min) | 12.929 |
| Circular space width (Max actual) | 2.56 |
| Circular space width (Min effective) | 2.494 |

| Motor size | L1 [mm] | L2 [mm] | L3 [mm] | L4 [mm] | Weight [kg] |
|------------|---------|---------|---------|---------|-------------|
| NX82HM | 236 | 160 | 93 | 25 | 12.5 |
| NX84HM | 296 | 220 | 123 | 25 | 20 |
| NX86HM | 356 | 280 | 153 | 25 | 27.5 |

Note: Also available with ISO 3019/2 interface (please contact Parker)

Standard SAE A interface

With cold plates (for oil and water cooling)

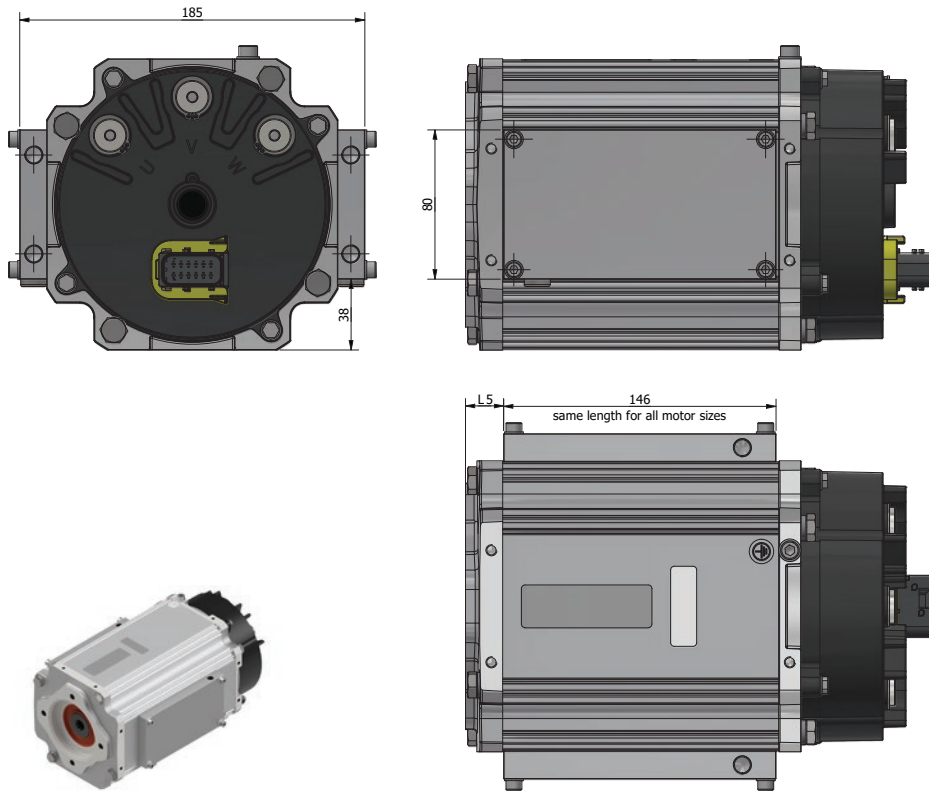


| Motor size | L4 [mm] | Threads | Threads depth | Weight [kg] |
|-----------------|---------|----------|---------------|-------------|
| NX82LM / NX82WM | 20 | BSP G1/8 | 10 | 13 |
| NX84LM / NX84WM | 45.5 | BSP G1/8 | 10 | 20.5 |
| NX86LM / NX86WM | 75.5 | BSP G1/8 | 10 | 28 |

Dimensions - Low Voltage

Standard SAE B interface

Natural Convection

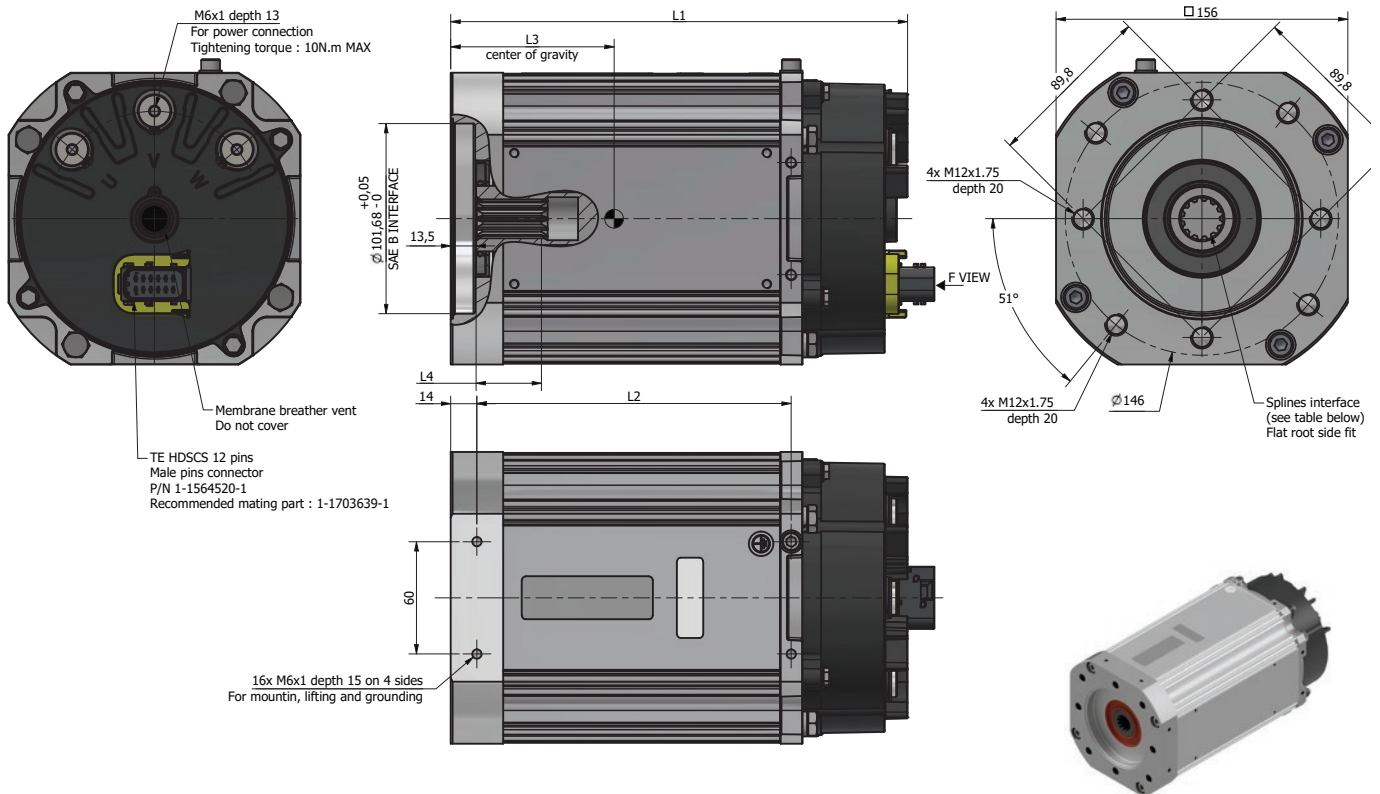


| ANSI B92.1 | SAE B |
|---|---------|
| Flat root side fit | Class 5 |
| Number of teeth | 13 |
| Spline Pitch | 16/32 |
| Pressure angle | 30° |
| Base diameter (Ref) | 17.873 |
| Pitch diameter (Ref) (Runout of 0.08mm at PCD) | 20.638 |
| Major diameter (Max) | 22.885 |
| Form diameter (Max) | 22.327 |
| Minor diameter (Min) | 19.151 |
| Circular space width (Max actual) | 2.56 |
| Circular space width (Min effective) | 2.494 |

| Motor size | L1 [mm] | L2 [mm] | L3 [mm] | L4 [mm] | Weight [kg] |
|------------|---------|---------|---------|---------|-------------|
| NX82HM | 244 | 168 | 90 | 35 | 13 |
| NX84HM | 304 | 228 | 120 | 35 | 20.5 |
| NX86HM | 364 | 288 | 150 | 35 | 28 |

Note: Also available with ISO 3019/2 interface (please contact Parker)

Standard SAE B interface

With cold plates (for oil and water cooling)

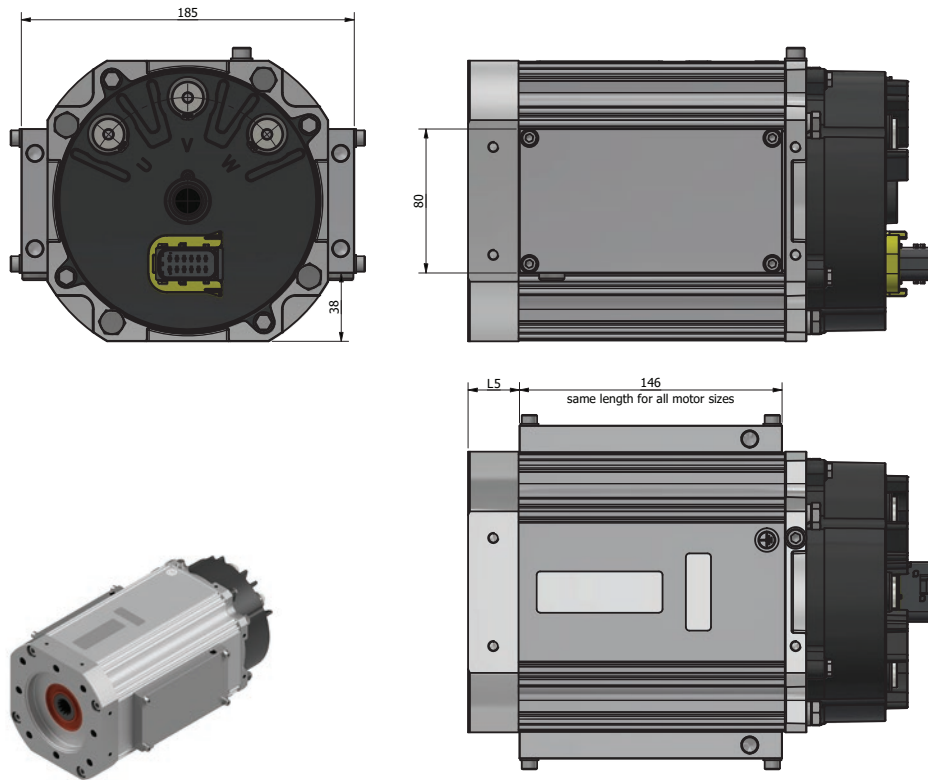


| Motor size | L5 [mm] | Threads | Threads depth | Weight [kg] |
|------------------------|---------|----------|---------------|-------------|
| NX82LM / NX82WM | 28.5 | BSP G1/8 | 10 | 13.5 |
| NX84LM / NX84WM | 54 | BSP G1/8 | 10 | 21 |
| NX86LM / NX86WM | 84 | BSP G1/8 | 10 | 28.5 |

Dimensions - High Voltage

Standard SAE A interface

Natural Convection

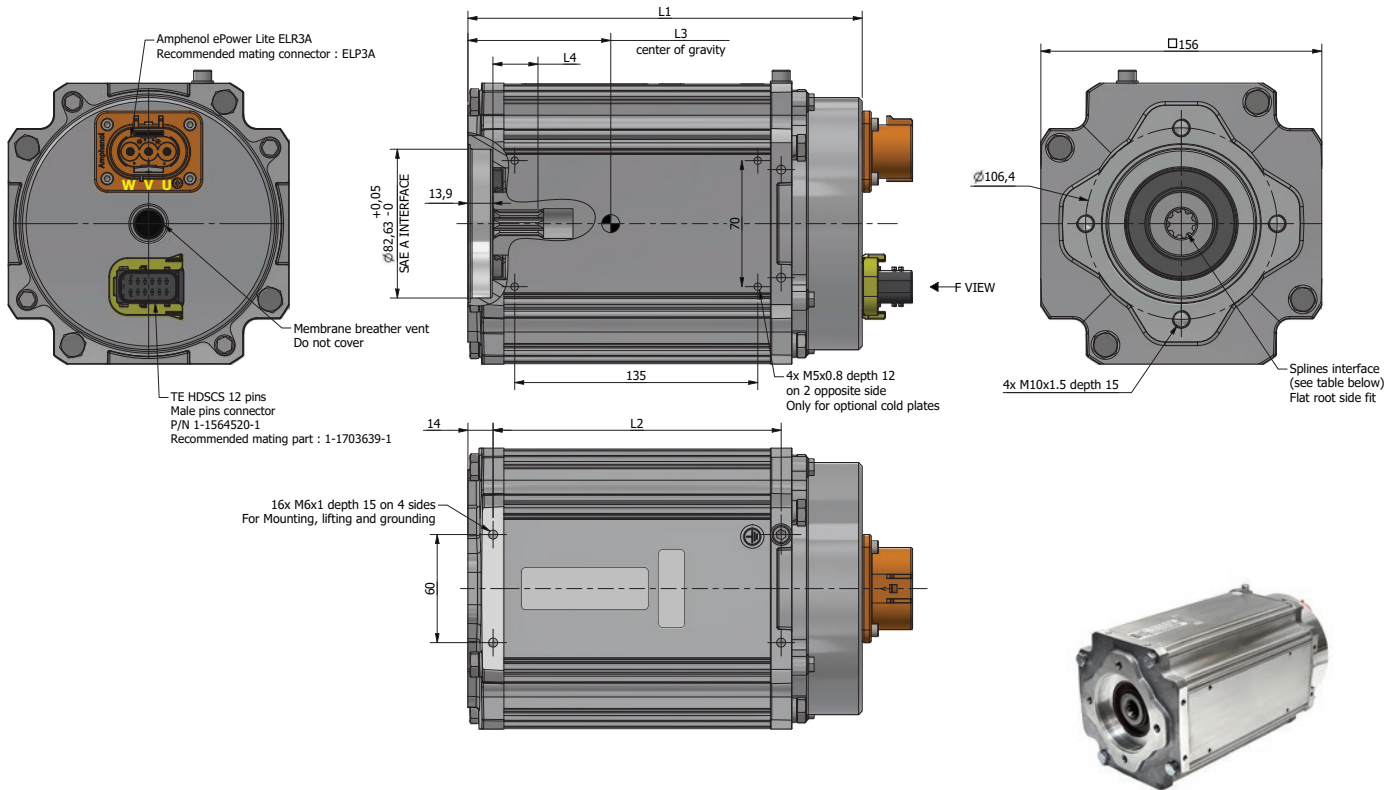


| ANSI B92.1 | SAE A |
|---|---------|
| Flat root side fit | Class 5 |
| Number of teeth | 9 |
| Spline Pitch | 16/32 |
| Pressure angle | 30° |
| Base diameter (Ref) | 12.373 |
| Pitch diameter (Ref) (Runout of 0.08mm at PCD) | 14.288 |
| Major diameter (Max) | 16.535 |
| Form diameter (Max) | 15.977 |
| Minor diameter (Min) | 12.929 |
| Circular space width (Max actual) | 2.56 |
| Circular space width (Min effective) | 2.494 |

| Motor size | L1 [mm] | L2 [mm] | L3 [mm] | L4 [mm] | Weight [kg] |
|------------|---------|---------|---------|---------|-------------|
| NX82KM | 219 | 160 | 93 | 25 | 12.9 |
| NX84KM | 279 | 220 | 123 | 25 | 20.4 |
| NX86KM | 339 | 280 | 153 | 25 | 27.9 |

Note: Also available with ISO 3019/2 interface (please contact Parker)

Standard SAE A interface

With cold plates (for oil and water cooling)

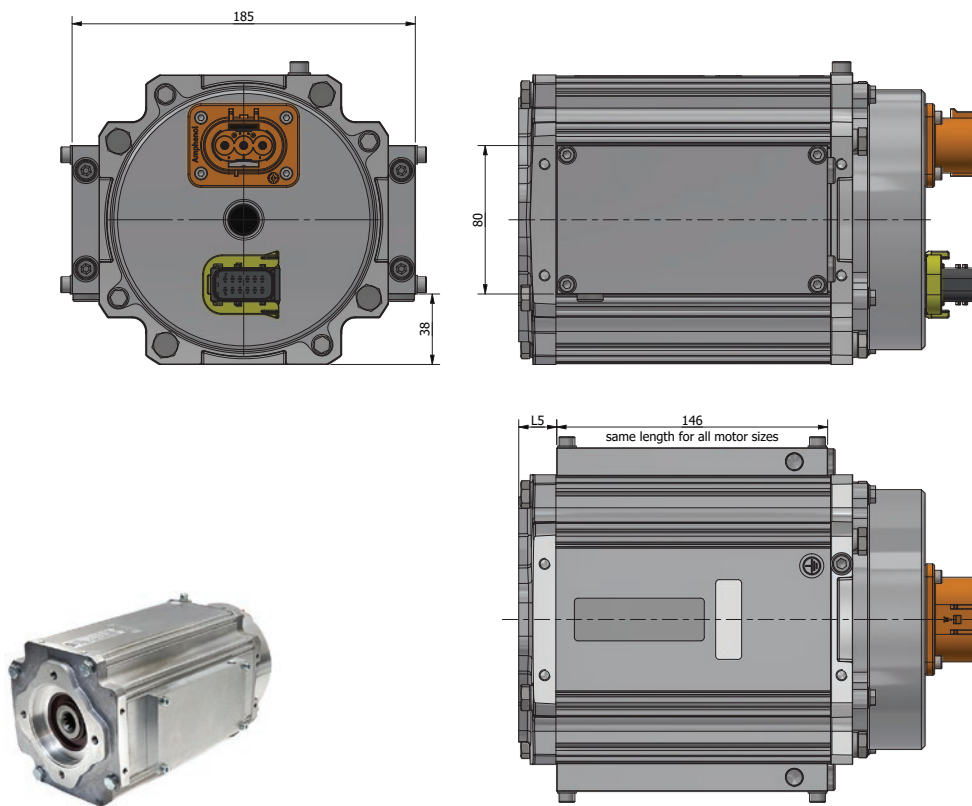


| Motor size | L4 [mm] | Threads | Threads depth | Weight [kg] |
|------------------------|---------|----------|---------------|-------------|
| NX82LM / NX82WM | 20 | BSP G1/8 | 10 | 14 |
| NX84LM / NX84WM | 45.5 | BSP G1/8 | 10 | 22 |
| NX86LM / NX86WM | 75.5 | BSP G1/8 | 10 | 30 |

Dimensions - High Voltage

Standard SAE B interface

Natural Convection

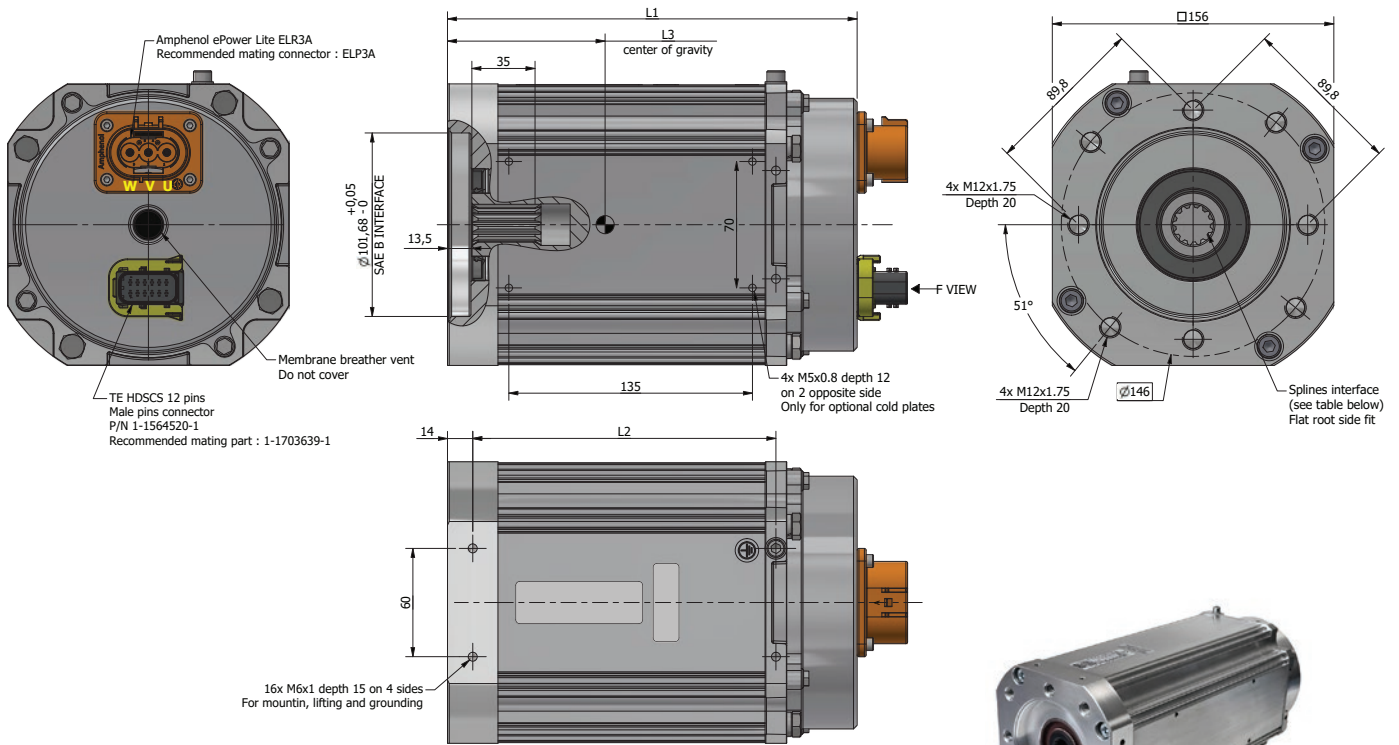


| ANSI B92.1 | SAE B |
|---|---------|
| Flat root side fit | Class 5 |
| Number of teeth | 13 |
| Spline Pitch | 16/32 |
| Pressure angle | 30° |
| Base diameter (Ref) | 17.873 |
| Pitch diameter (Ref) (Runout of 0.08mm at PCD) | 20.638 |
| Major diameter (Max) | 22.885 |
| Form diameter (Max) | 22.327 |
| Minor diameter (Min) | 19.151 |
| Circular space width (Max actual) | 2.56 |
| Circular space width (Min effective) | 2.494 |

| Motor size | L1 [mm] | L2 [mm] | L3 [mm] | Weight [kg] |
|------------|---------|---------|---------|-------------|
| NX82HM | 227 | 168 | 90 | 14 |
| NX84HM | 287 | 228 | 120 | 21 |
| NX86HM | 347 | 288 | 150 | 29 |

Note: Also available with ISO 3019/2 interface (please contact Parker)

Standard SAE B interface

With cold plates (for oil and water cooling)

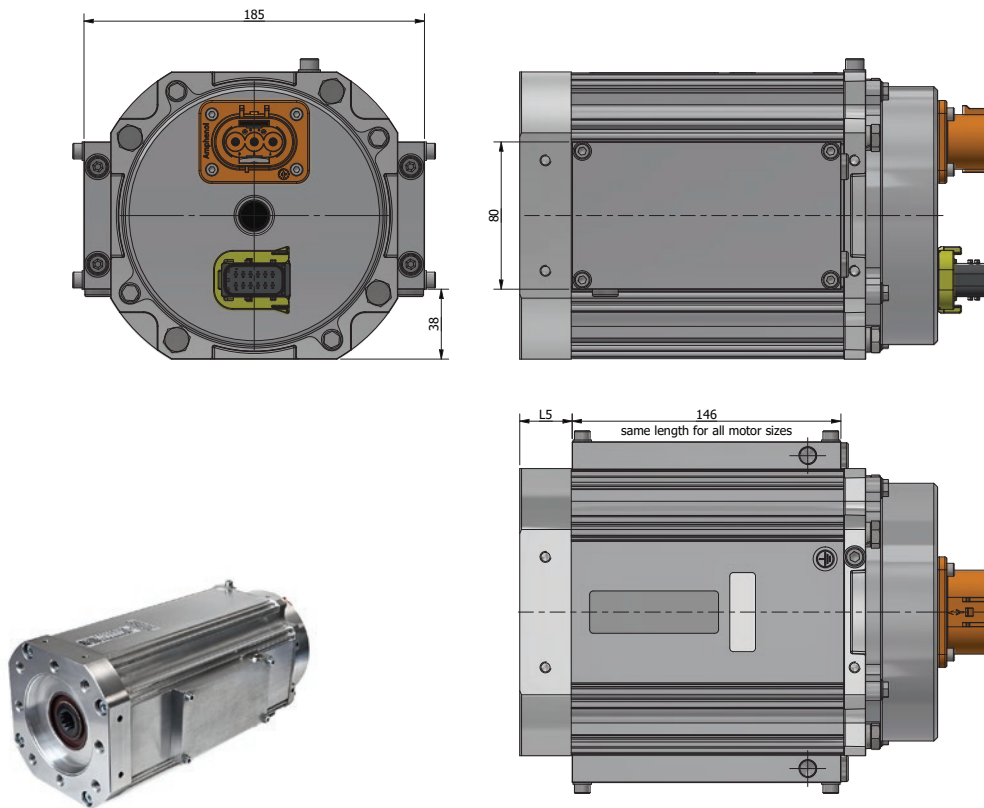

| Motor size | L5 [mm] | Threads | Threads depth | Weight [kg] |
|------------------------|---------|----------|---------------|-------------|
| NX82LM / NX82WM | 28.5 | BSP G1/8 | 10 | 15 |
| NX84LM / NX84WM | 54 | BSP G1/8 | 10 | 22 |
| NX86LM / NX86WM | 84 | BSP G1/8 | 10 | 30 |

Available Interfaces

Pilot

Especially for direct coupled shafts it is extremely important to align both of them as good as possible to prevent forces due to misalignments.

| Interface size | Pilot diameter in mm |
|----------------|----------------------|
| SAE-A | 82.63 - 82.68 |
| SAE-B | 101.68 - 101.73 |
| ISO 3019/2 | 80.01 - 80.04 |

Female pilot centering dimensions and tolerances per ANSI B92.1/ DIN ISO-3019/2

When using a third party pump, make sure the male pilot dimensions fall in between these limits, to guarantee a fretting free operation.

Flange pattern


| Interface size | Flange pattern |
|----------------|------------------------------------|
| SAE-A | 2-bolt M10 - depth 15 mm |
| SAE-B | 2-bolt or 4-bolt M12 - depth 20 mm |
| ISO 3019/2 | 4-bolt M8 - depth 15 mm |

Mounting bolt pattern and bolt size per ANSI B92.1/ DIN ISO-3019/2

NX8M Immersed in Oil

Benefits

- Improved motor/pump performances
- Lower noise level

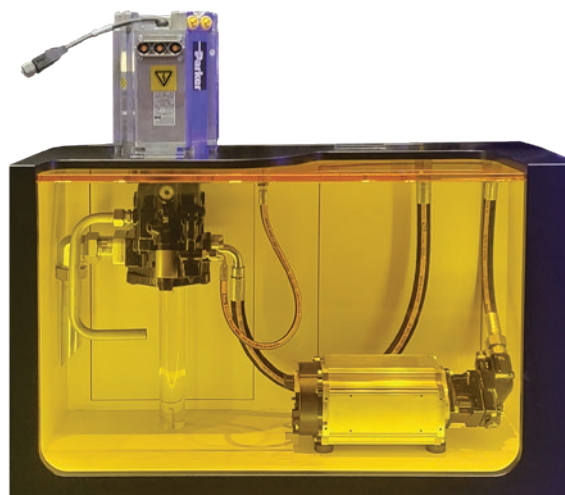

Oil Inside ISO46 60°C

| Inverter input voltage | Motor Type | Max speed rpm | Rated torque N.m | Rated power kW | Peak Power kW |
|------------------------|------------|---------------|------------------|----------------|---------------|
| 24Vdc | NX82LMSC | 4000 | 17.5 | 5.1 | 14.1 |
| | NX84LMSB | 2700 | 38.7 | 8.4 | 21.4 |
| | NX86LMSB | 2000 | 62.9 | 8.8 | 20.4 |
| 48Vdc | NX82LMSC | 4000 | 15 | 6.1 | 22.4 |
| | NX84LMSC | 3500 | 32.2 | 9.7 | 31 |
| | NX86LMSB | 3000 | 46.1 | 13 | 46.6 |
| 96Vdc | NX82LMSG | 4000 | 15.6 | 6.3 | 22.4 |
| | NX84LMSD | 3500 | 30 | 9.3 | 39.4 |
| | NX86LMSC | 3200 | 45.8 | 12.6 | 59.1 |

Order Code

| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
|---------------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| Order example | NX | 8 | 6 | H | M | S | C | A | 6 | G | 00 |


| | | |
|-----------|---------------------------------|--|
| 1 | Motor range | |
| | NX | Standard version |
| | NK* | Kit version |
| 2 | Motor frame size | |
| | 8 | |
| 3 | Stack length module | |
| | 2 / 4 / 6 | |
| 4 | Cooling type | |
| | H | Natural convection |
| | L | Low Voltage |
| | W | |
| | K | Natural convection |
| | F | High Voltage |
| | G | |
| 5 | Market | |
| | M | Mobile |
| 6 | Encoder | |
| | A | Resolver |
| | S | SinCos |
| 7 | Winding | |
| | A...G | see tables page 6 & 8 |
| 8 | Mechanical configuration | |
| | A | SAE A 9T spline shaft, 2 bolts flange |
| | B | SAE B 13T spline shaft (to be combined with SAE B front flange) |
| | I | ISO3019/2 flange - DIN5480 18T spline shaft |
| | O* | SAE A 9T spline shaft, 2 bolts flange - motor immersed in oil (IP54) |
| | P* | SAE B 13T spline shaft - motor immersed in oil (IP54) - (to be combined with SAE B front flange) |
| | R* | IISO3019/2 flange - DIN5480 18T spline shaft - motor immersed in oil (IP54) |
| | S* | SAE A 9T spline shaft, 2 bolts, wet spline coupling |
| | T* | SAE B 13T spline shaft, wet spline coupling - (to be combined with SAE B front flange) |
| | U* | ISO3019/2 flange - DIN5480 18T spline shaft wet spline coupling |
| 9 | Connection | |
| | 6 | Low voltage Terminal + feedback connector |
| | 7 | High voltage Power connector + feedback connector |
| 10 | Thermal sensor | |
| | G | PT1000 on feedback connector |
| 11 | Mechanical Interface | |
| | 00 | Standard (with SAE A or ISO 3019/2) |
| | 02 | Kit version* |
| | 05 | SAE B front flange, 2 or 4 bolts (only in combination with SAE B shafts) |

* On request (please contact Parker)



Cooling

Cold Plates

The proposed cold plates can be used in two different ways in accordance with the two pictures hereunder. The flow direction can be reversed if requested in order to facilitate the cooling connection.

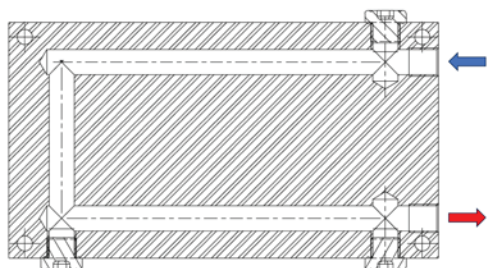

Back configuration cooling Inlets/Outlets

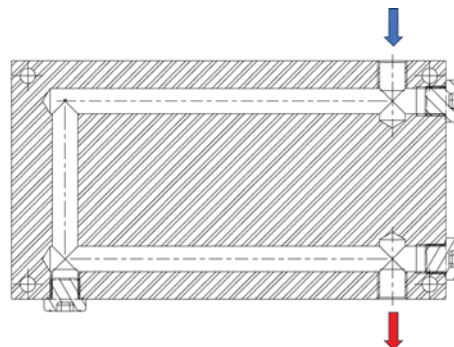

Up/Down configuration cooling Inlets/Outlets


Don't forget that when you use hexagonal plug and rotate it, it will need more space and probably touch the motor, especially on the back configuration setting

As example, the cold plate are 15mm thick but a 14mm hexagonal will touch the motor with the back configuration

Hoses and Fittings

Version for protected environment

3801 Connector

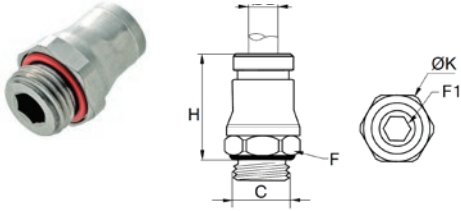

| Part Number | C | D mm | F mm | F1 mm | H mm | K mm |
|-------------|------|------|------|-------|------|------|
| 3801 08 10 | G1/8 | 8 | 15 | 5 | 19 | 16.5 |

Hoses



1025P Semi-rigid polyamide (PA) tubing

Tubepack 25 m

| Ø ext. mm | Ø int. mm | R | Incolore | BLK | BRN | RED | BLU | YEL | GRA | kg |
|-----------|-----------|----|------------|------------|------------|------------|------------|------------|------------|-------|
| 8 | 6 | 25 | 1025P08 00 | 1025P08 01 | 1025P08 02 | 1025P08 03 | 1025P08 04 | 1025P08 05 | 1025P08 06 | 0.790 |

Please consult catalogue for more information: [Parker Legris General Catalogue](#)

Version for harsh environment

Connector



| Part number | A | B | H |
|-------------|------|------|------|
| 3D982-2-4C | 36mm | 17mm | 14mm |

Hoses

| Part Number | Hose I.D. | | | | Hose O.D. mm | Pressure Rating | | | | Vaccum* kPa | min. bend radius mm | weight kg |
|------------------|-----------|------|------|-----|-----------------|------------------------------------|----------------------------------|--|--|----------------|------------------------|--------------|
| | DN | Inch | Size | mm | | max. working pressure MPa / psi | min. burst pressure MPa / psi | | | | | |
| 801PLUS-4-XXX-RL | 6 | 1/4 | -4 | 6.4 | 12.7 | 2.4 / 350 | 9.7 / 1400 | | | 95 | 65 | 0.13 |

Colour codes / BLK = black / BLU = blue / RED = red / BRN = green / GRA = grey / YEL = yellow / RL = only available on reels



* The vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101 kPa
 Note: When ordering, please replace in the part number XXX with the relevant colour code. Example: 801PLUS-4-BLU-RL


Please consult catalogue for more information: [Fitting and Hose Catalogue](#)

Power Cables


Low Voltage Version

| Description | Inverter Compatibility | Order code * |
|--------------------------------|------------------------|--------------|
| Power cable 35 mm ² | GVI-C | GVCP01035x01 |
| Power cable 50 mm ² | GVI-D / E | GVCP01050x02 |
| Power cable 70 mm ² | GVI-D / E | GVCP01070x02 |

* x indicates cable length in meters : A=1m B=2m C=3m D=4m




2 Shield connectors to be used with each power cable
Ref : MB 100/10/M6+M4/MSKL 8-18



High Voltage Version

| Description | Order code * |
|--|--------------|
| Power cable 20-00 Epower lite 3 x 10 mm ² | GVCP20010x00 |

* x indicates cable length in meters : B=2m D=4m

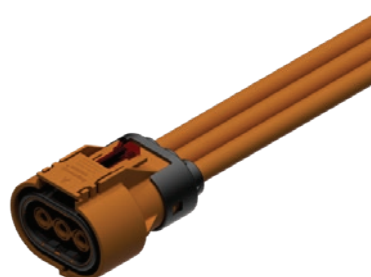

Feedback Cable

| Description | Order code * |
|---|--------------|
| Connector + sensor cable / SinCos ⁽¹⁾ + Resolver | GVCF03000x00 |

* x indicates cable length in meters : B=2m D=4m



⁽¹⁾ In case of SinCos encoder, take care to connect the cable shield to the vehicle chassis.
The motor housing must be at the same potential than the drive body.

Global Vehicle Motor - GVM

Overview

Features

- High efficiency
- High power density
- Can be used either as motor or generator
- Operating voltages available from 24 to 800 VDC
- Rare earth magnets allow high temperature operation
- Patent pending cooling
- Custom mounting and electrical connection solutions available for high volume applications



Typical Applications

- Electric motors/generators for hybrid applications
- Electric motors for motorbikes, scooters...
- Traction applications
- Electro-hydraulic pumps for high power cylinders
- Electric power steering
- Auxiliary applications as fan/compressors for air conditioning

Testing and Validation Details*:

Mechanical

- Random and swept sine vibration testing to simulate worst case fatigue exposure to SAE J1455
- Shock and vibration levels exceeding SAE J1455 for unsprung mass applications.

Environmental

- Dust and sand, and gravel bombardment to SAE J1455
- Salt Spray - Fog and Immersion to SAE J1455

Electrical

- HiPot insulation test to IEC 34-1 at $2 \times V_{RMS} + 1000 V_{RMS}$
- Insulation resistance to ISO 6469-3
- EMC emission and immunity to IEC 34-1 (motor only)

Technical Characteristics - Overview

| | |
|---|--|
| Motor type | Permanent Magnet synchronous motor |
| Magnet materials | Rare earth magnets |
| Number of poles | 12 |
| Battery voltage | 24 to 800 VDC |
| Power range | up to 350 kW (continuous) |
| Torque range | up to 2300 Nm (peak) |
| Speed range | up to 9800 min ⁻¹ |
| Ambient temperature¹⁾ | liquid cooled: -40...+120 °C natural convection: -40...+65 °C |
| Storage temperature¹⁾ | -40...+120 °C |
| Sensor | Resolver or SinCos encoder |
| Insulation of the stator winding | Class H with potting |
| Protection | IP67 as standard IP6K9K on request |
| Random vibration* | 0,1 g ² /Hz in frequency range 5...2000 Hz (12 g rms – 3x8h) |
| Operational shock* | 25 g, 11 ms, 3x6 (with 2 directions per axis) |
| Thermal protection | 1 PTC probes and 1 KTY84-130 sensor |
| Shaft end | Spline shaft (male or female), other possibilities on request |
| Connections | Terminal box (flying cables for kits); connector for feedback |
| Marking | UL and CE |

¹⁾ With resolver as feedback

Note: the motors are designed for horizontal operation. In case of vertical installation, please contact us.

In case of axial or radial load on the shaft, please consult the acceptable limits on the GVM technical manual.

* These tests are valid for GVM210 and GVM310 motors up to GVM310-250. (for bigger sizes please contact us)

A smaller size of GVM142 motor is available, you can check the catalog here :

[GVM142 catalogue - North America](#)

[GVM142 catalogue - Europe](#)

RELIABILITY & DURABILITY

- Long lifetime
- Reduced downtime
- Less maintenance
- Subjected to rigorous environmental testing
- High ingress protection level available
- Ceramic bearings*

DURABILITY/RELIABILITY

are characteristics of the GVM that make it suitable for rough environments.

THAT'S 5400 TIMES
AROUND THE WORLD!



QUICK FACT:

Over 135 million road miles have been logged by Parker GVM motors since 2012.

Test standards meet **SAE J1455** for Dust, Sand, Gravel Bombardment, Humidity, Salt Spray and Immersion, Operating Temps from -40° to 120°C, Crash Shock, and Vibration

*All GVM310 sizes and GVM210 over 150 mm lamination stack length.

EFFICIENCY

- Lower energy consumption for compliance with emerging energy legislations and green initiatives
- Up to 2% more efficient than comparable PMAC designs
- Operates efficiently as motor or generator for maximum energy recovery during braking and deceleration
- Reduced vehicle emissions for smaller CO₂ footprint

EFFICIENCY

is the motor's capability to produce useful mechanical power efficiently. A more efficient motor reduces the cost to operate, runs cooler, and is better for the environment.

UP TO
**2% MORE EFFICIENT THAN
COMPETITIVE MOTORS**

GVM applications have reduced emissions by over 20,000 tons of CO₂

Parker's higher efficiency GVM means a **cost reduction of the vehicle battery or longer range between charges.**



Parker

- Reduced battery size
- Extended vehicle range
- Lower cost of ownership over life of vehicle
- Reduced thermal losses allow for smaller, less expensive vehicle cooling system

POWER DENSITY

- Reduced space claim
- Less weight for better performance
- Lighter motor can provide larger payload capacity
- Helps vehicle designers meet packaging and performance goals
- Patented cooling helps achieve vehicle performance objectives
- Enhanced productivity in the form of higher vehicle capacity

POWER DENSITY

refers to the amount of power produced relative to the physical size of the motor.

FROM
40% TO 100%
MORE PEAK POWER
THAN COMPETITIVE MOTORS



The high power density of the GVM saves on installation cost when compared to oil cooled motors.

Reduced space claim -

Up to
66%

better power density than competitive motors

Technical Characteristics - GVM210

| GVM210 Motor Model Number | Battery Voltage | Rated Torque Mn | Rated Power Pn | Rated Current In | Rated Speed Nn | Peak Torque Mp | Peak Power Pp | Peak Current Ip | Max Speed Nmax* | Ke 25°C 77°F |
|---------------------------|-----------------|-----------------|----------------|------------------|----------------|----------------|---------------|-----------------|-----------------|--------------|
| | [VDC] | [Nm] | [kW] | [Arms] | [rpm] | [Nm] | [kW] | [Arms] | [rpm] | [Vrms/Krpm] |
| GVM210050PBB1W | 96 | 33.2 | 18.8 | 183 | 5400 | 82.5 | 26.2 | 412 | 8000 | 15.4 |
| GVM210050PGF1W | 350 | 28.6 | 12.6 | 33.8 | 4200 | 82.5 | 16.7 | 73.7 | 8000 | 85.9 |
| GVM210050PEH1W | | 30.4 | 17.8 | 47.7 | 5600 | 82.5 | 24.4 | 104.9 | 8000 | 60.4 |
| GVM210050RJH1W | 650 | 30.8 | 17.1 | 24.4 | 5290 | 82.5 | 23.9 | 55.4 | 7300 | 114 |
| GVM210100PAN1W | 96 | 68.9 | 33.2 | 324 | 4600 | 172 | 43.8 | 683 | 8000 | 19.4 |
| GVM210100PEH1W | 350 | 61.2 | 19.3 | 52.2 | 3020 | 172 | 23.9 | 106 | 6700 | 125 |
| GVM210100PGF1W | 650 | 60.7 | 25.4 | 36.1 | 4000 | 172 | 32 | 74.5 | 4700 | 178 |
| GVM210100PEH1W | | 63.7 | 35.8 | 50.5 | 5360 | 172 | 46.8 | 106 | 6700 | 125 |
| GVM210150PAN1W | 96 | 98.3 | 34.7 | 340 | 3380 | 261 | 43.3 | 684 | 5000 | 29.5 |
| GVM210150PDD1W | 350 | 80.5 | 27.8 | 73.3 | 3300 | 261 | 33.5 | 146.3 | 6000 | 138 |
| GVM210150PGF1W | 650 | 89.8 | 25.5 | 37.3 | 2710 | 261 | 31.6 | 74.7 | 3100 | 270 |
| GVM210150PCB1W | | 95.9 | 72.3 | 101 | 7200 | 262 | 99.3 | 222 | 8000 | 90.8 |
| GVM210200PAR1W | 96 | 126 | 29.7 | 296 | 2250 | 351 | 36 | 591 | 3000 | 45.8 |
| GVM210200PAM1W | 350 | 129 | 103 | 266 | 7600 | 351 | 177.3 | 745 | 8000 | 36.4 |
| GVM210200PEH1W | 650 | 135 | 37.3 | 53.6 | 2640 | 351 | 45.5 | 106.4 | 3300 | 254 |
| GVM210200PBG1W | | 134 | 101 | 142 | 7200 | 351 | 149.9 | 336 | 8000 | 80.6 |
| GVM210300PAR1W | 96 | 185 | 29 | 299 | 1500 | 530 | 34.3 | 591 | 2000 | 69.2 |
| GVM210300PAK1W | 350 | 209 | 123 | 329 | 5600 | 530 | 195.2 | 817 | 8000 | 50.1 |
| GVM210300PAR1W | 650 | 193 | 150 | 207 | 7400 | 530 | 264.5 | 591 | 8000 | 69.2 |
| GVM210400PAR1W | 96 | 202 | 28.5 | 306 | 1350 | 709 | 32.7 | 592 | 1500 | 92.5 |
| GVM210400PAK1W | 350 | 257 | 129 | 340 | 4800 | 709 | 194 | 817 | 8000 | 67 |
| GVM210400PAK1W | 650 | 232 | 180 | 259 | 7400 | 709 | 366.6 | 817 | 8000 | 67 |

*The maximum operating speed depends on maximum BEMF accepted by the drive (values given for a Peak Voltage of 1200V)

Max. mechanical speed is 8 000 rpm.

Values in table represent GVM ratings with input cooling liquid at 65°C (Characteristics are given for an optimal drive/motor association without any limitation coming from the drive). For alternative cooling temperatures please contact us.

Technical Characteristics - GVM310

| GVM310 Motor Model Number | Battery Voltage | Rated Torque Mn | Rated Power Pn | Rated Current In | Rated Speed Nn | Peak Torque Mp | Peak Power Pp | Peak Current Ip | Max Speed Nmax* | Ke |
|---------------------------|-----------------|-----------------|----------------|------------------|----------------|----------------|---------------|-----------------|-----------------|-------------|
| | [VDC] | [Nm] | [kW] | [Arms] | [rpm] | [Nm] | [kW] | [Arms] | [rpm] | [Vrms/Krpm] |
| GVM310125PBG2W | 350 | 302 | 92 | 241 | 2910 | 700 | 147 | 685 | 8000 | 96 |
| GVM310125PBA1W | | 222 | 100 | 266 | 4280 | 610 | 165 | 902 | 8000 | 64 |
| GVM310125PMW1W | | 198 | 114 | 300 | 5500 | 610 | 185 | 1015 | 8000 | 58 |
| GVM310125PCE2W | 650 | 292 | 104 | 145 | 3390 | 700 | 170 | 424 | 5500 | 154 |
| GVM310125PBT2W | | 256 | 108 | 151 | 4040 | 700 | 205 | 514 | 6600 | 128 |
| GVM310125PNP1W | | 204 | 117 | 166 | 5500 | 610 | 192 | 559 | 8000 | 106 |
| GVM310200PMP1W | 350 | 315 | 165 | 437 | 5010 | 990 | 241 | 1323 | 8000 | 73 |
| GVM310200PMW2W | | 442 | 124 | 325 | 2670 | 1140 | 216 | 984 | 8000 | 105 |
| GVM310200PMP2W | | 419 | 145 | 378 | 3310 | 1140 | 281 | 1287 | 8000 | 81 |
| GVM310200PBG2W | 650 | 463 | 161 | 225 | 3310 | 1140 | 280 | 694 | 5500 | 153 |
| GVM310200PNH1W | | 308 | 159 | 225 | 4930 | 990 | 229 | 678 | 6300 | 134 |
| GVM310200PNC1W | | 334 | 178 | 253 | 5090 | 990 | 283 | 828 | 7300 | 116 |
| GVM310250PBA1W | 350 | 542 | 138 | 370 | 2420 | 1240 | 166 | 906 | 6400 | 132 |
| GVM310250PMW1W | | 404 | 147 | 390 | 3480 | 1240 | 185 | 987 | 7100 | 119 |
| GVM310250PMP1W | | 432 | 179 | 475 | 3960 | 1240 | 241 | 1320 | 8000 | 90 |
| GVM310250PMW1W | 650 | 434 | 228 | 323 | 5010 | 1240 | 350 | 1022 | 7100 | 119 |
| GVM310250PNC2W | | 537 | 177 | 246 | 3150 | 1430 | 331 | 814 | 5200 | 162 |
| GVM310250PMW2W | | 479 | 199 | 278 | 3960 | 1430 | 409 | 1001 | 6400 | 132 |

*The maximum operating speed depends on maximum BEMF accepted by the drive (values given for a Peak Voltage of 1200V)
Max. mechanical speed is 8 000 rpm.

Values in table represent GVM ratings with input cooling liquid at **65°C** (Characteristics are given for an optimal drive/motor association without any limitation coming from the drive). For alternative cooling temperatures please contact us.


| | Battery Voltage [VDC] | Continuous torque at low speed [N.m] | Max. torque [N.m] | Continuous power [kW] | Peak power [kW] | Maximal speed [rpm] | Continuous Power density [kW/kg] | Peak Power density [kW/kg] |
|-------------------------------|-----------------------|--------------------------------------|-------------------|-----------------------|-----------------|---------------------|----------------------------------|----------------------------|
| Low Flux - Solid Wire | | | | | | | | |
| GVM310300xxx | 650 | 930 | 1500 | 233 | 420 | 5500 | 1.29 | 2.33 |
| GVM310400xxx | 650 | 1250 | 2010 | 296 | 420 | 5500 | 1.29 | 1.83 |
| Low Flux - Litz Wire | | | | | | | | |
| GVM310300xxx | 650 | 840 | 1500 | 274 | 720 | 5500 | 1.52 | 4.00 |
| GVM310400xxx | 650 | 1140 | 2010 | 325 | 720 | 5500 | 1.41 | 3.13 |
| High Flux - Solid Wire | | | | | | | | |
| GVM310300xxx | 650 | 1050 | 1720 | 228 | 500 | 5500 | 1.27 | 2.78 |
| GVM310400xxx | 650 | 1400 | 2300 | 303 | 500 | 5500 | 1.32 | 2.17 |
| High Flux - Litz Wire | | | | | | | | |
| GVM310300xxx | 650 | 970 | 1720 | 264 | 850 | 5500 | 1.47 | 4.72 |
| GVM310400xxx | 650 | 1250 | 2300 | 351 | 850 | 5500 | 1.53 | 3.70 |

Motor data with water cooling @65°C.

For more details on the winding definition, please contact us.

Dimensions - GVM210

Power connector option 6 - Terminal Box

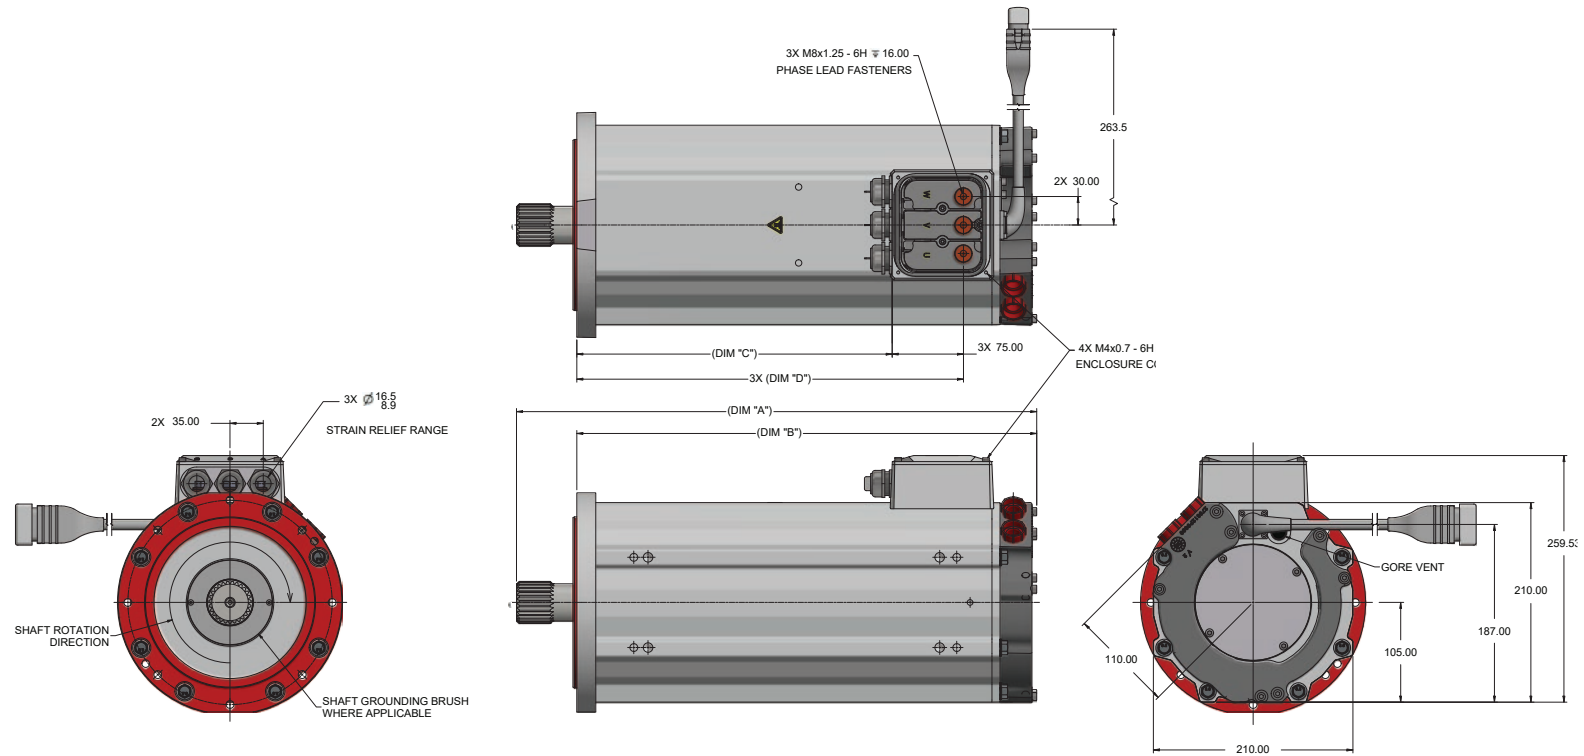


| Spline Option | TA | | | | TB | | | |
|-------------------|-------|-------|-----|-----|-------|-------|-------|-----|
| | A | B | C | D | A | B | C | D |
| GVM210-050 | 273.6 | 234.2 | 82 | 157 | na | na | na | na |
| GVM210-100 | 323.6 | 284.2 | 132 | 207 | na | na | na | na |
| GVM210-150 | na | na | na | na | 397.6 | 334.1 | 182.2 | 257 |
| GVM210-200 | na | na | na | na | 447.6 | 384.1 | 232.2 | 307 |
| GVM210-300 | na | na | na | na | 547.6 | 484.1 | 332.2 | 407 |
| GVM210-400 | na | na | na | na | 647.6 | 584.1 | 432.2 | 507 |

All dimensions in mm.

Dimensions


Power connector option 3 - 1 x HV PowerLok™ 300A

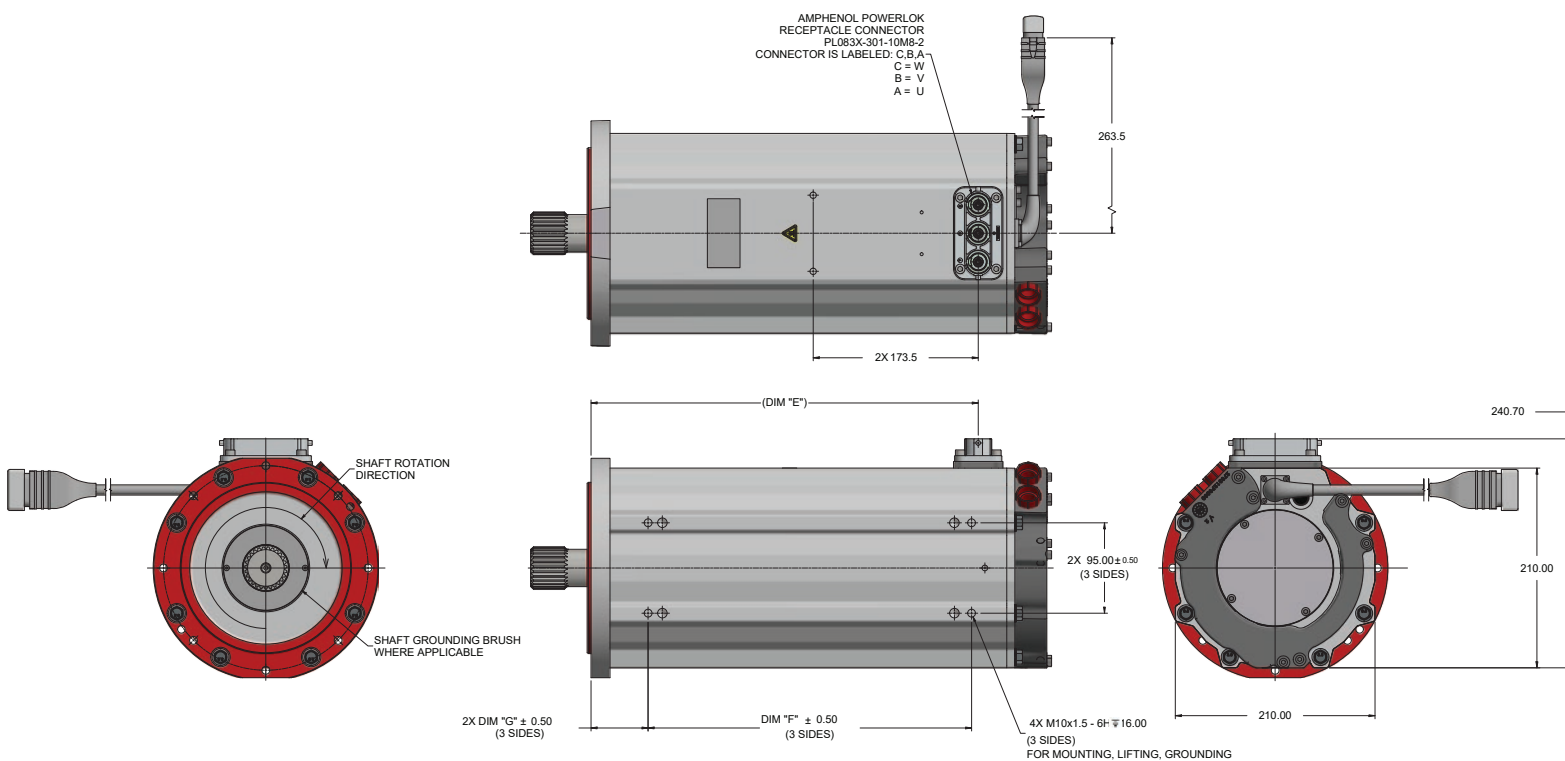

| Stack Length | TRACTION | | | Weight |
|-------------------|----------|-----|----|--------|
| | E | F | G | [kg] |
| GVM210-050 | 157 | 90 | 60 | 25 |
| GVM210-100 | 207 | 140 | | 36 |
| GVM210-150 | 257 | 190 | | 47 |
| GVM210-200 | 307 | 240 | | 59 |
| GVM210-300 | 407 | 340 | | 77 |
| GVM210-400 | 507 | 440 | | 98 |

All dimensions in mm.

Dimensions

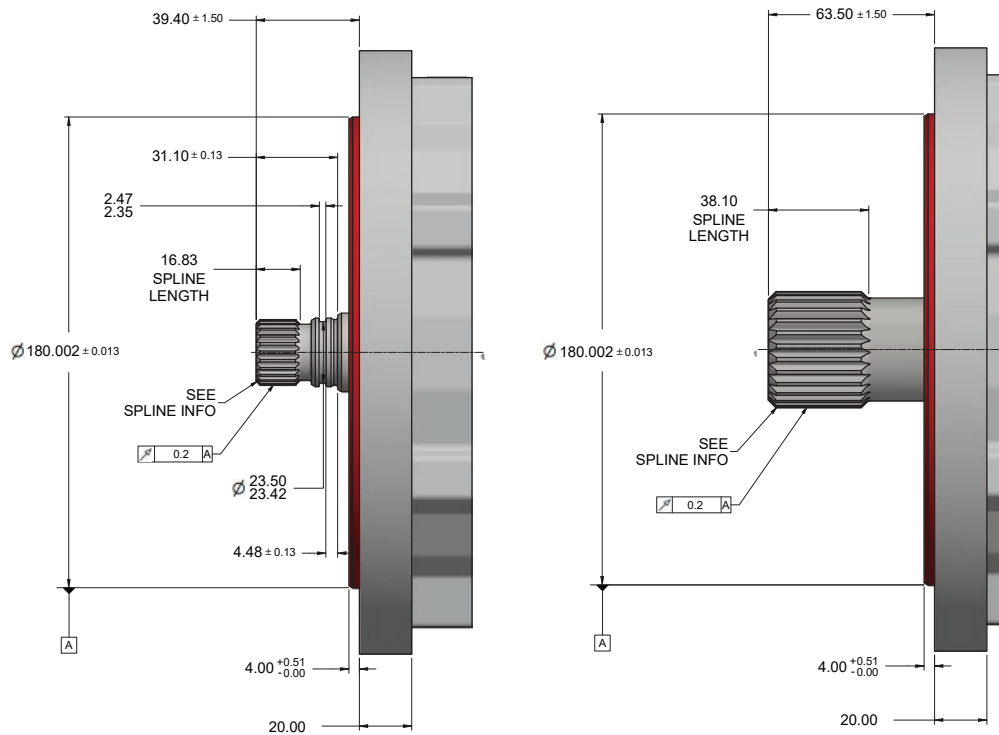


Spline Interface Data

| | TA | TB |
|---|--------------------|---------------------|
| GVM210 Motor Frame Size | 050 - 100 | 150 - 400 |
| Involute Spline | ANSI B92.2M | ANSI B92.1 |
| Side fit | Flat Root Class 6h | Fillet Root Class 5 |
| Number of teeth | 24 | 27 |
| Module | 1.0000 | N/A |
| Spline Pitch | N/A | 16/32 |
| Pressure angle | 30.0° | 30.0° |
| Pitch diameter (Ref) | 24.000 | 42.863 |
| Base diameter (Ref) | 20.785 | 37.12 |
| Major diameter (Ref) | 24.75-25.00 | 44.32-44.45 |
| Minor diameter (Max) | 22.26-22.5 | 39.27 |
| Form diameter (Max) | 22.89 | 41.17 |
| Circular tooth thickness (Max effective) | 1.571 | 2.456 |
| Circular tooth thickness (Min actual) | 1.485 | 2.421 |
| Pin diameter | 2.120 | 3.048 |
| Measurement over pins (Ref) | 27.399-27.479 | 47.406-47.459 |

All dimensions in mm.


Consult factory for wet spline option

Dimensions GVM210 EHP

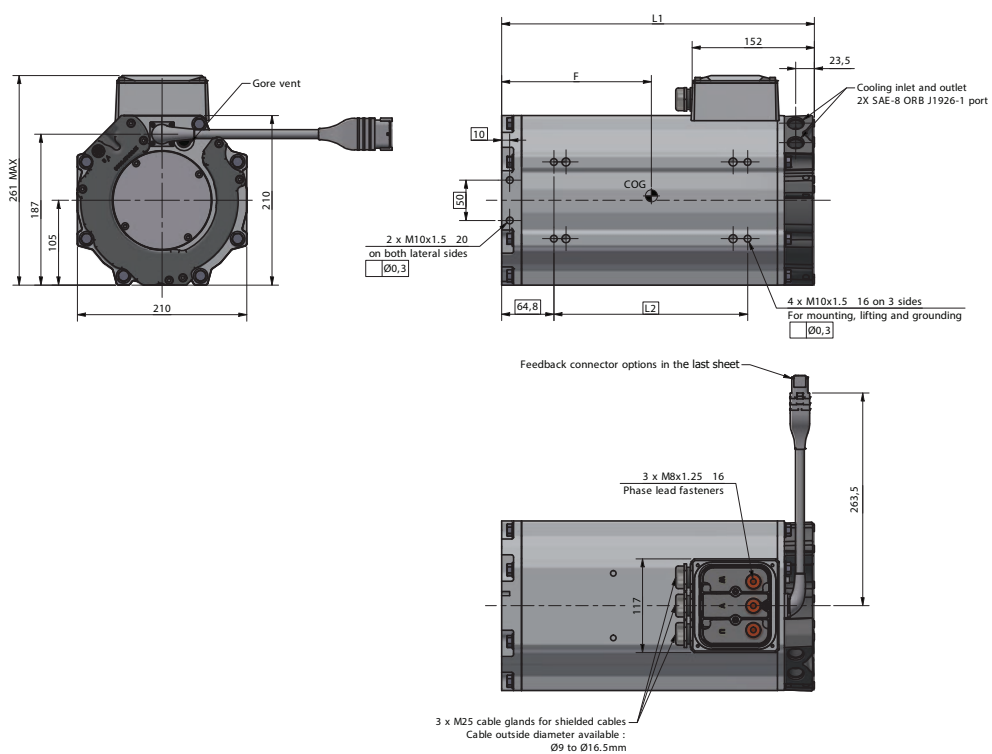

| Motor size | L1 max. | L2 | Weight [kg] | F |
|-------------------|---------|-----|-------------|-----|
| GVM210-050 | 239 | 90 | 27 | 108 |
| GVM210-100 | 289 | 140 | 38 | 133 |
| GVM210-150 | 339 | 190 | 48 | 158 |
| GVM210-200 | 389 | 240 | 59 | 183 |
| GVM210-300 | 489 | 340 | 79 | 233 |
| GVM210-400 | 589 | 440 | 99 | 283 |

Dimensions

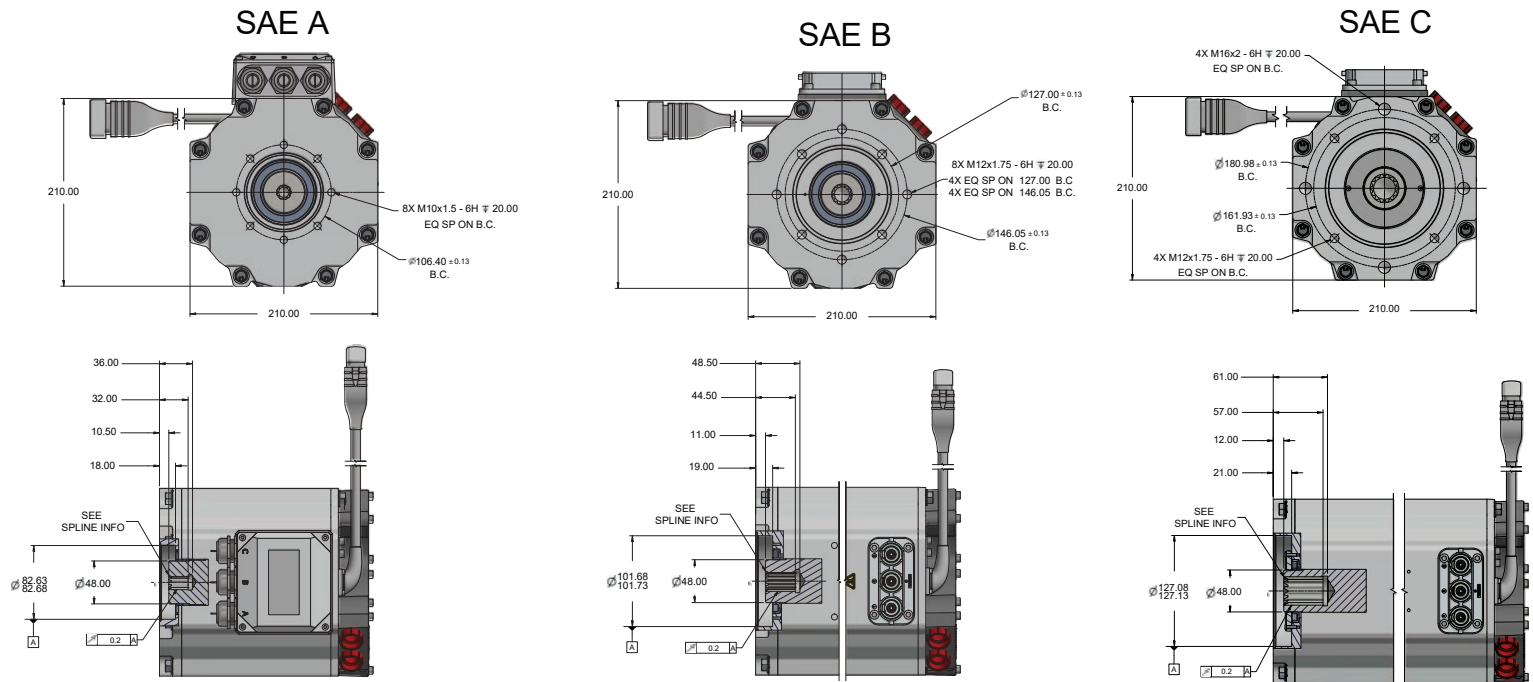

SAE Interface Data

| MODIFIED FROM ANSI B92.1 - 1972 CLASS 5 | | | |
|---|---------------|---------------|---------------|
| SAE type | SAE A | SAE B | SAE C |
| Number of bolt holes | 2 | 2 / 4 | 2 / 4 |
| GVM210 Motor Frame Size | 050 | 050 - 150 | 150 - 400 |
| Number of teeth | 9 | 13 | 14 |
| Pitch | 16/32 | 16/32 | 12/24 |
| Pressure angle | 30° | 30° | 30° |
| Base diameter (Ref) | 12.372 | 17.871 | 25.664 |
| Pitch diameter (Ref) | 14.287 | 20.637 | 29.634 |
| Major diameter (Min/Max) | 16.484/16.586 | 22.606/22.86 | 32.334/32.588 |
| Form diameter (Min) | 15.976 | 22.326 | 31.851 |
| Minor diameter (Min/Max) | 12.928/13.055 | 19.151/19.278 | 27.686/28.067 |
| Circular space width max actual | 2.567 | | 3.398 |
| Circular space width min effective | 2.494 | | 3.324 |
| Circular space width min actual | | | 3.362 |
| Measurement between pins (max) | 10.010/10.109 | 16.527/16.603 | 24.33/24.406 |
| Pin diameter | 2.743 | | 3.657 |

All dimensions in mm.


Note: Terminal box and Amphenol Powerlok options are available for all motors sizes.

Dimensions - GVM310 / SAE Pump Mount Style

GVM310 (125-250)


All dimensions in mm.

Power connector option 3 - 1 x HV PowerLok™ 300A

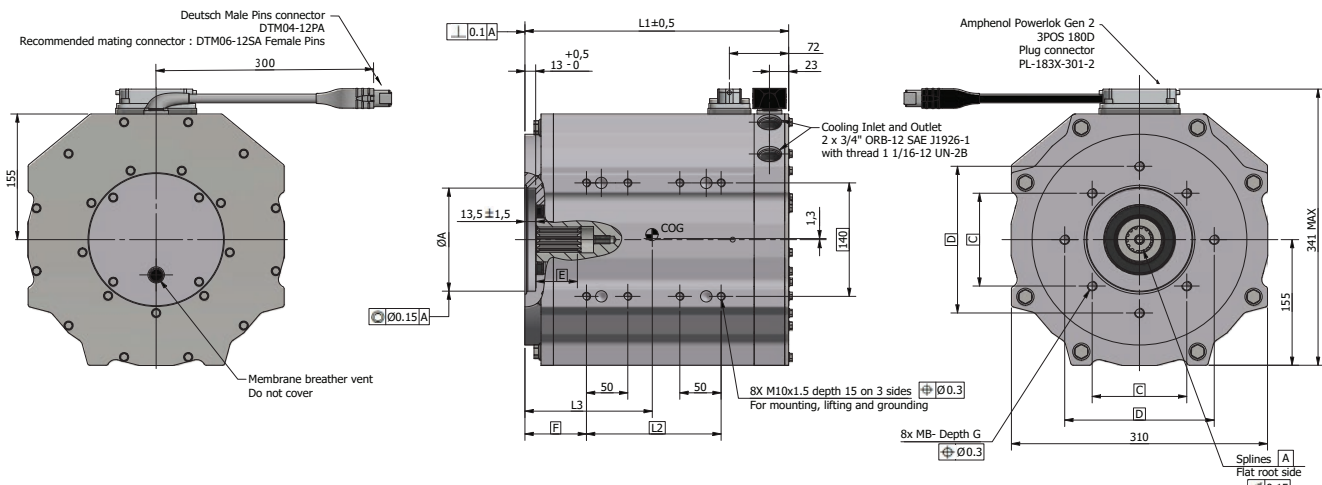

GVM310 (300-400)

Power connector - PowerLok™ 500A

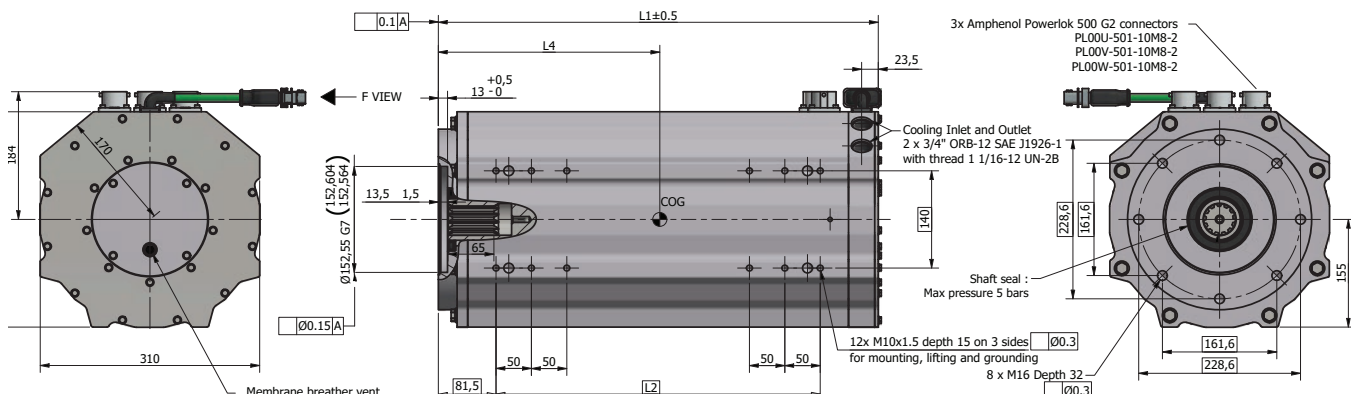

Motor Data

| Motor size | L1 | L2 | L3 | SAE C | SAE D | Weight |
|------------|-----|-----|-----|-------|-------|--------|
| GVM310-125 | 320 | 163 | 154 | X | na | 97 |
| GVM310-200 | 395 | 238 | 191 | X | na | 132 |
| GVM310-200 | 402 | 238 | 197 | na | X | 132 |
| GVM310-250 | 452 | 288 | 222 | na | X | 157 |
| GVM310-300 | 521 | 358 | - | na | X | 180 |
| GVM310-400 | 621 | 458 | - | na | X | 230 |

SAE Interface Data

| SAE Type | A | B | C | D | E | F | G |
|----------|-----------|----|-------|-------|----|------|----|
| SAE C | Ø127.15G7 | 12 | 114.5 | 181 | 50 | 74.5 | 25 |
| SAE D | Ø152.55G7 | 16 | 161.6 | 228.6 | 65 | 81.5 | 32 |

Spline Interface Data

| ANSI B92.1 | SAE C | SAE D |
|--------------------------------------|---------|---------|
| Number of bolt holes | 2 / 4 | 4 |
| Flat root side fit | Class 5 | Class 6 |
| Number of teeth | 14 | 13 |
| Spline Pitch | 12/24 | 8/16 |
| Pressure angle | 30° | 30° |
| Base diameter (Ref) | 25.663 | 35.745 |
| Pitch diameter (Ref) | 29.63 | 41.275 |
| Major diameter (Max) | 32.588 | 45.669 |
| Form diameter (Max) | 31.852 | 44.452 |
| Minor diameter (Min) | 27.610 | 38.252 |
| Circular space width (Max actual) | 3.426 | 5.095 |
| Circular space width (Min effective) | 3.325 | 4.986 |


Consult factory for wet spline option

Dimensions - GVM310 / Traction Mount (SAE4)

GVM310 (125 - 250)


All dimensions in mm.

Power connector option 3 - 1 x HV PowerLok™ 300A

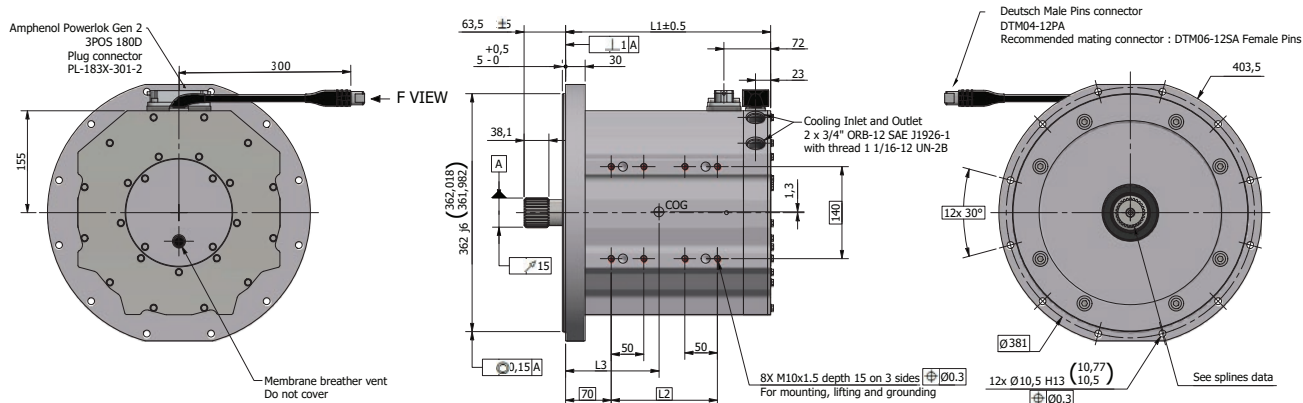

GVM310 (300-400)

GVM310 TC / Traction Mount

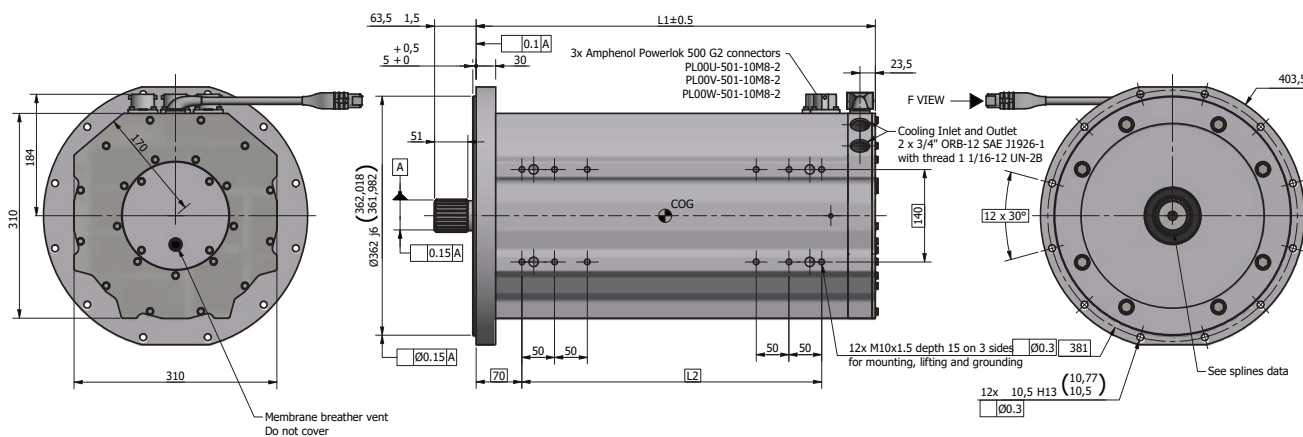

Motor Data

| Motor size | L1 | L2 | L3 | Shaft Interface | Weight |
|------------|-----|-----|-------|-----------------|--------|
| GVM310-125 | 315 | 163 | 143.5 | TB | 100 |
| GVM310-200 | 390 | 238 | 180 | TB | 134 |
| GVM310-250 | 440 | 288 | 204.5 | TB | 157 |
| GVM310-300 | 510 | 358 | - | TC | 180 |
| GVM310-400 | 610 | 458 | - | TC | 230 |

Spline Interface Data

| ANSI B92.1 | TB Involute Spline |
|--|---------------------|
| Side fit | Fillet Root Class 5 |
| Number of teeth | 27 |
| Spline Pitch | 16/32 |
| Pressure angle | 30.0° |
| Base diameter (Ref) | 37.12 |
| Pitch diameter (Ref) | 42.863 |
| Major diameter | 44.45/44.32 |
| Form diameter (Max) | 41.17 |
| Minor diameter | 40.36 |
| Circular tooth thickness (Max effective) | 2.456 |
| Circular tooth thickness (Min actual) | 2.421 |
| Pin diameter | 3.048 |
| Measurement over pins (Ref) | 47.460/47.407 |

| DIN 5480 | TC |
|--|--------|
| Number of teeth | 26 |
| Module | 2 |
| Pressure angle | 30° |
| Tip circle diameter | 54.6 |
| Root form circle diameter | 50.92 |
| Root circle diameter, coldrolled | 50.2 |
| Tooth thickness (Max effective) | 3.478 |
| Actual maximum reference tooth thickness | 3.348 |
| Actual minimum reference tooth thickness | 3.398 |
| Measuring circle diameter | 3 |
| Max ref dimension over measuring circles | 56.063 |
| Min dimension over measuring circles | 55.98 |

Consult factory for wet spline option

Order Code

| | | | | | | | | | | | |
|---------------|------------|------------|------------|----------|------------|----------|----------|----------|----------|----------|-----------|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
| Order example | GVM | 310 | 200 | P | BA1 | W | R | B | 3 | 1 | PD |

| | | | |
|-----------------------------------|------------------------|--|-----------------------|
| 1 Motor series | GVM | Global Vehicle Motor | |
| 2 Frame size (outer width) | 210 | 210 mm | |
| | 310 | 310 mm | |
| 3 Stack length | | GVM210 | GVM310 |
| | 050 | x | |
| | 100 | x | |
| | 125 | | x |
| | 150 | x | |
| | 200 | x | x |
| | 250 | | x |
| | 300 | x | x |
| | 400 | x | x |
| 4 Type of Motor Series | P | Power Series | |
| 5 Magnetics option | | See motor tables | |
| 6 Cooling system | W | Liquid cooling (please contact us for flow & cooling temperature data) | |
| 7 Feedback | R | Brushless resolver | |
| | S | Sincos encoder (GVM210 only) | |
| 8 Thermal switch | B | 2 x PT1000 (all sizes) | |
| 9 Power Termination | 3 | 1 x HV PowerLok™ 300A PL083X-301 | |
| | 4² | 3 x HV PowerLok™ 500A PL00x-500 ³ | |
| | 5^{1,2} | 2 x HV PowerLok™ 300A PL083X-301 | |
| | 6 | Terminal Box (GVM210 only) | |
| 10 Feedback Termination | 1 | 12 male pin pigtail Deutsch DTM04-12PA | |
| | 2¹ | 16 male pin pigtail TE HDSCS 16 | |
| 11 Output Shaft | | GVM210 | GVM310 |
| | PA | SAE A | page 16-19 |
| | PB | SAE B | page 16-19 |
| | BB | SAE B-B | |
| | PC | SAE C | page 16-19 page 20-24 |
| | PD | SAE D | page 20-24 |
| | TA | Traction | page 16-18 |
| | TB | Traction | page 16-18 page 21-23 |
| | TC | Traction | page 24 |
| | IT¹ | ISO7653 - Truck standard (GVM210 only) | |
| | WA¹ | Wet spline SAE A | |
| | WB¹ | Wet spline SAE B | |
| | WC¹ | Wet spline SAE C | |
| | WD¹ | Wet spline SAE D | |

¹ Please consult us

² GVM310 only


³ x = U / V / W for the 3 motor phases



Cooling

Adapter

GE-UNF/UN you need this adapter. It's screwed directly on the GVM manifold and allow you to use the Push-Lok connector.



Please consult catalogue for more information: [Tube Fitting Catalogue](#)

Connector

Push-Lock connector.

Available in 3 orientations, straight, 45° and 90°

On this connector, the hoses are simply insert on it.



Corresponding Table

Here is a table summarizing the parts to use for the different sizes of GVM.



| Size | GVM 210 adapter | GVM310 Adapter | Straight push-lock | 45° push-lok | 90° push-lok | Hoses |
|-------------|------------------|-------------------------|--------------------|--------------|--------------|-------------|
| 13mm | GE15L3/4UNFOMDCF | Not available on GVM310 | 3CA82-15-8 | 3CE82-15-8 | 3CF82-15-8 | 801TM-8-RL |
| 16mm | GE18L3/4UNFOMDCF | GE18L11/16UNOMDCF | 3CA82-18-10 | 3CE82-18-10 | 3CF82-18-10 | 801TM-10-RL |

Please consult catalogue for more information: [Fitting and Hose Catalogue](#)

Hoses

801TM Push-Lok
Fire retardant cover

Construction

Tube: Synthetic rubber

Reinforcement: High-tensile fibre braid

Cover: Fire retardant synthetic rubber

Temperature Range -40 °C up to +100 °C

Exception: Air max. +70 °C

Water max. +85 °C

Recommended Fluids

Air, water, water-oil-emulsions and
water-glycol-emulsions.

Consult the chemical compatibility section on Parker
catalog for more detailed information



- Very flexible
- UL approved:
- Class YDQS2 with VW-1 flame test
- UL 94 V0 for cover compound

| Part Number | Hose I.D. | | | | Hose O.D. mm | Pressure Rating | | | | Vaccum* kPa | min. bend radius mm | weight kg |
|-------------|-----------|------|------|------|-----------------|-----------------------|-----|---------------------|------|----------------|---------------------------|--------------|
| | DN | Inch | Size | mm | | max. working pressure | | min. burst pressure | | | | |
| | | | | | | MPa | psi | MPa | psi | | | |
| 801TM-8-RL | 12 | 1/2 | -8 | 12.7 | 19.4 | 2.1 | 350 | 8.4 | 1200 | 95 | 125 | 0.27 |
| 801TM-10-RL | 16 | 5/8 | -10 | 15.9 | 23.1 | 2.1 | 350 | 8.4 | 1200 | 51 | 150 | 0.28 |

* The vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101 kPa

Note: When ordering, please replace in the part number XXX with the relevant colour code. Example: 801PLUS-4-BLU-RL

Please consult catalogue for more information: [Fitting and Hose Catalogue](#)

Low Voltage Parker-Curtis Motor Controllers

The F-Series low voltage motor controllers from Parker-Curtis are designed specifically for mobile applications requiring precise motor control, integrated vehicle logic, and robust safety features. Supporting battery systems typically ranging from 12 to 144VDC, these controllers combine power electronics with advanced control software to manage traction, pumps, steering, and auxiliary functions.



With compact designs, high efficiency, and proven reliability in harsh environments, Parker-Curtis motor controllers enable OEMs to simplify system architecture, reduce installed cost, and deliver smooth, responsive machine performance.



Technical Data

| | Single Drive | | | | Dual Drive | | |
|--|---|-------------|-------------|--------------|-------------|---|---|
| Model(s) | AC F2-A | AC F4-A | AC F6-A | AC F10-A | AC F16-R | AC F2-D | AC F5-DE |
| Nominal Voltage Range ¹ | 12-48V | 24-96V | 24-96V | 24-96V | 72-144V | 24-48V | 36-96V |
| Peak Current Range ¹ (S2, 2 min.) | 120-280Arms | 150-500Arms | 375-650Arms | 550-1000Arms | 700-900Arms | 2x 120-240Arms | 2x 275-450Arms |
| Operating Temperature | -40°C to 50°C | | | | | | |
| Weight | 1.1 kg | 1.9 kg | 3.1 kg | 5.0 kg | 7.0 kg | 1.5 kg | 4.5 kg |
| Dimensions (mm) | 120x155x55 | 1180x140x75 | 212x155x78 | 230x200x94 | 275x232x85 | 206x150x70 | 230x200x90 |
| Ingress Protection | IP65/IP67 | | | | | | |
| EMC | EN12895 | | | | | | |
| Safety | EN 1175 EN ISO 13849-1 EN IEC 60204-1 | | | | | EN 1175 EN 280-1 EN ISO 13849-1 EN IEC 60204-1 | EN 1175 EN ISO 13849-1 EN IEC 60204-1 |
| UL | UL583/cUL583 ² | | | | | | |

¹See product datasheet for full model range and voltage/current configurations

²Pending on F16-R

High Voltage Parker-Curtis Motor Controllers

The **GMI Series** delivers advanced high-voltage motor control solutions designed for next-generation electric and hybrid mobile machines.

Engineered for demanding off-highway and industrial environments, GMI controllers provide precise traction and work-function control while enabling scalable electrification across vehicle platforms.



Supporting battery systems up to 750V class, the GMI family combines high-efficiency power electronics, integrated functional safety architecture, and flexible vehicle system control in compact, rugged packages optimized for mobile applications.

From compact auxiliary electrification to high-power traction systems exceeding 150 kW peak power, GMI controllers allow OEMs to standardize on a common control platform across multiple machine types—reducing integration complexity while improving performance, efficiency, and reliability.



Technical Data

| Model | | GMI 070 | GMI 100 | GMI 020 |
|--|---------------------|--|--------------------------|--------------------------|
| Operating Voltage Range (without derating) | | 150–500VDC ¹ | 150–800 VDC ¹ | 150–800 VDC ¹ |
| Operating Voltage Range (with derating) | | 500–525VDC | 800-825 VDC | 800-825VDC |
| LV Supply Voltage Range | | 12–24 VDC | 12–24 VDC | 12–24 VDC |
| Current Range ² | Continuous, 60 min. | 100-150Arms | 75-125Arms | 27Arms |
| | S2, 2 min. | 200-300Arms | 140-200Arms | 45Arms |
| Operating Temperature | | –40°C to 50°C | –40°C to 50°C | –40°C to 50°C |
| Weight | | 7.2 kg | 6.5 kg | 4.1 kg |
| Dimensions (mm) | | 315 x 290 x 98 | 309 x 278 x 92 | 223 x 158 x 90.5 |
| Ingress Protection | | IP6K9K/IP67 | | |
| EMC | | EN 12895, ISO 13766-1 and ISO 13766-2 | | |
| Safety | | EN 1175-1:2025 and EN ISO 13849-1:2023 | | |
| Environmental & Chemical | | ISO 16750-3 & -4 and ISO 19014-3 | | |
| UL | | UL583 | | |

¹ Overvoltage protection cuts back the regenerative braking (regen) current when the voltage is above 525/825 VDC.

² See product datasheet for full model range and voltage/current configurations

High Voltage Global Vehicle Inverter - GVI

Safe, Smart and Scalable, the second generation of GVI mobile inverters provide a single-family solution for both traction and work function applications, on and off-road. The robust WEG cooled housing is rated up to IP6K9K and altitudes of up to 5000m.

Plug and socket connections on the front face simplify installation, and the comprehensive configuration software tool combined with both CANopen and J1939 interfaces gives system design flexibility.

Designed for pairing with the Parker GVM range of PMAC mobile motors, the series has the perfect balance of efficiency, performance and reliability. GVI integrates seamlessly with Parker's IQAN range of products, and with Electro-Hydraulic Pump (EHP) applications in mind, the GVI features onboard I/O tailored to hydraulic work functions.



Technical Data

| Model | GVI125 | GVI250 |
|--------------------------|---|--------|
| Supply Voltage | 200-750V DC | |
| Continuous Current (1hr) | 180 A | 360 A |
| Overload | 130% for 60 seconds | |
| Continuous Power | 125 kW | 250 kW |
| Switching Frequency | 1.5 - 8 kHz Variable ¹ | |
| Temperature Range | -40°C to 65°C | |
| Altitude | 0-5000m | |
| Housing | IP67/IP6K9K | |
| Cooling | WEG 50:50 -20°C to 65°C | |
| Output Frequency | 0-1333Hz ² | |
| Auxiliary Supply | 8-32V DC | |
| CAN Interfaces | CANopen, J1939, DM1, UDS ³ | |
| Compliance | EN61800-5, IEC61800-3, ISO 13849, ISO6469, R10, R100, CISPR25 Edition 4, Class 3, ISO 11452, ISO7637, 61000 | |

¹ Higher switching frequencies may require current derating

² Software limited to 590Hz

³ 125 baud - 1M baud, with/without termination

Configured ePump

Configured ePumps are designed and optimized for hybrid electric and all electric mobile applications. Configured ePumps consist of a GVM motor, directly coupled to an hydraulic pump and controlled by a high performance mobile hardened GVI inverter.

Parker's configured ePumps provide the lowest possible installed cost and highest efficiency while still maintaining superior reliability in the most demanding applications.

Please consult ePump catalogue for more information:


[Catalogue ePumps North America](#)

[Catalogue ePumps Europe](#)



Modular Electric Power Take Off (ePTO)

- Compact enclosed assembly for optimal vehicle integration
- Customised plug and play system
- Multiple control modes
 - Pressure / Flow
 - Electric load sensing
- Reduce complexity with "one-stop shop" supplier
- Low energy consumption with efficient solution - operation on demand

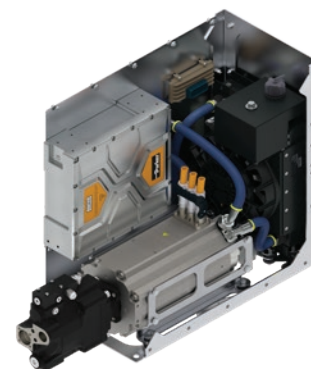

Please consult ePTO brochure for more information: [Brochure ePTO](#)

Thermal Management

The QDC cooler range, whether 24 VDC or 600 VDC ties in perfectly with Parker inverters and motors ensuring greatest efficiency for all electrified applications.

- 20-30% more efficient cooling matrix
- Low noise fan and fan housing
- High performance fan drive with integrated inverter
- Fan speed control from 1200 RPM to 4750 RPM
- Air free fluid
- 50-60% less space and power consumption
- Silent operation
- Compact design - low space claim



Please consult Thermal Cooling catalogue for more information: [Thermal Management catalogue](#)

